

# Copeland Scroll™

ZX condensing unit for refrigeration applications



Product Catalogue

**Copeland Scroll™**

  
**EMERSON™**  
Climate Technologies

## About Emerson Climate Technologies

Emerson Climate Technologies, a business segment of Emerson, is the world's leading provider of heating, air conditioning and refrigeration solutions for residential, industrial and commercial applications. The group combines best-in-class technology with proven engineering, design, distribution, educational and monitoring services to provide customized, integrated climate-control solutions for customers worldwide. Emerson Climate Technologies' innovative solutions, which include industry-leading brands such as Copeland Scroll and White-Rodgers, improve human comfort, safeguard food, and protect the environment. For more information, visit [EmersonClimateAsia.com](http://EmersonClimateAsia.com).

## Our Vision

Emerson Climate Technologies, With Our Partners,  
Will Provide Global Solutions To Improve Human Comfort,  
Safeguard Food And Protect The Environment.

*Emerson Climate Technologies is pleased to offer the ZX platform refrigeration condensing units (CDU) specifically designed for medium temperature (ZX-MT & ZXB-MT), digital modulated variable capacity medium temperature (ZXD) and low temperature (ZXL-LT) refrigeration.*

*ZX series CDU has been highly successful in the Asian market and enjoys proven success with its energy savings and customer-friendly electronic features.*



# Table of Contents

<b>Features and Benefits</b>	04
<b>Nomenclature</b>	05
<b>Bill of Material</b>	05
<b>ZX Platform Electronic Controller</b>	06
<b>Operating Envelopes</b>	
ZX Family: Medium Temperature	09
ZXB Family: Medium Temperature	09
ZXD Family: Digital Medium Temperature	09
ZXL Family: Low Temperature	10
<b>Performance Data</b>	
ZX Family: Medium Temperature - R22	11
ZX Family: Medium Temperature - R404A	13
ZX Family: Medium Temperature - R407F	15
ZXB Family: Medium Temperature - R134a	17
ZXD Family: Digital Medium Temperature - R22	19
ZXD Family: Digital Medium Temperature - R404A	20
ZXD Family: Medium Temperature - R407F	22
ZXL Family: Low Temperature - R22	24
ZXL Family: Low Temperature - R404A	26
ZXL Family: Low Temperature - R407F	28
<b>Technical Data</b>	
ZX Family: Medium Temperature at 50 Hz - PFJ	30
ZX Family: Medium Temperature at 50 Hz - TFD/TF5	31
ZX Family: Medium Temperature at 60 Hz - TF5/TF7	32
ZXB Family: Medium Temperature at 50 Hz - TFD/TF5	33
ZXB Family: Medium Temperature at 60 Hz - TF5/TF7	34
ZXD Family: Digital Medium Temperature at 50 Hz - TFD/TF5	35
ZXD Family: Digital Medium Temperature at 60 Hz - TF7	36
ZXL Family: Low Temperature at 50 Hz - TFD/TF5	37
ZXL Family: Low Temperature at 60 Hz - TF5/TF7	38
<b>Dimensional Drawings</b>	39
<b>Packing Information</b>	40
<b>Conversion Chart</b>	40
<b>Pressure Temperature Chart at Sea Level</b>	41
<b>Contact Lists</b>	44

# ZX Platform Condensing Unit was designed based on three factors demanded by industry users:


**Intelligent Store Solution** - A most innovative approach to enterprise facility management, Emerson's Intelligent Store™ architecture integrates hardware and services, to provide retailers a single view into their entire network of facilities and understanding what facilities actually cost to operate and maintain.

The Intelligent Store architecture transforms data from store equipment and controls into actionable insights. Designed to deliver value in both new and existing stores, Emerson aims to help the retailers:

- Make better decisions on recourses investment for greatest impact
- Gain accurate feedback and customized service to your specific needs
- Reduce operational costs and boost the profitability with most convenience

**Energy Efficiency** - Utilizing Copeland Scroll™ compressor technology, variable speed fan motor, large capacity condenser coil and advanced control algorithms, energy consumption is significantly reduced. End-users can save more than 20% on annual energy costs rather than using hermetic reciprocating units.

**Reliability** - Combining the proven reliability of Copeland Scroll™ compressors with advanced electronics controller and diagnostics, equipment reliability is greatly enhanced. Fault code alerts and fault code retrieval capabilities provide information to help improve speed and accuracy of system diagnostics. Integrated electronics provide protection against over-current, over-heating, incorrect phase rotation, compressor cycling, high pressure resets, low pressure cut-outs. It can also send out a warning message to an operator when there is a liquid floodback, which can prevent critical damage on the unit.

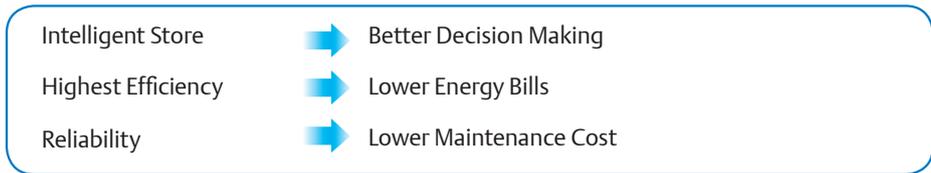


## ZXD Family



- Capacity modulation to control precise room temperature and humidity
- With real time monitoring of compressor operating conditions

## ZX, ZXB and ZXL Family

Proprietary electronic algorithms present advantage on diagnose, communication, and protection purposes. They are also fundamental to control fan speed, optimizing energy performance for local, seasonal ambient temperatures.

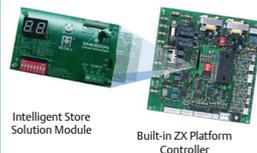


- Compressor Reverse Rotation
- Compressor Over Current
- Compressor Internal Motor Protector Trip
- Discharge Gas Over Heat
- High Pressure Cut Out
- Low Pressure Cut Out (only on MT series)
- Refrigerant Flood Back
- Compressor Minimum Off Time
- Internal Thermal Sensor Failure
- Intelligent Store Solution: Communication and Retail Store Monitoring

## Variable Speed PSC Fan Motors

- High Efficiency
- Ultra Quiet
- Optimizes Air-Flow for Maximum Heat Transfer

Oversized Condenser Coil for Maximum Heat Transfer

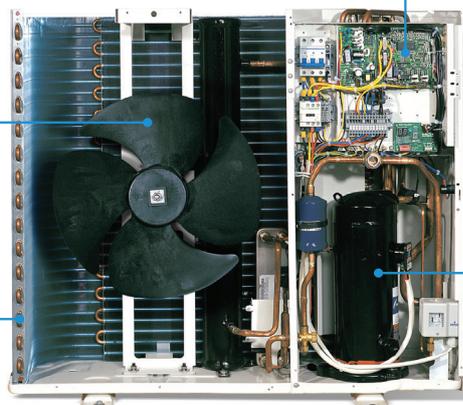

## Copeland Scroll Compressor Technology

- High Efficiency
- Ultra Quiet
- High Reliability

ZX Platform CDU Features

Features	Owner/Enterprise Benefits
Intelligent Store Solution	<ul style="list-style-type: none"> <li>• Retail store monitoring</li> <li>• Enhanced energy savings</li> <li>• High-end food safety by real time monitoring</li> </ul>
Energy Saving	<ul style="list-style-type: none"> <li>• Lower operating costs</li> </ul>
Diagnostic protection capabilities	<ul style="list-style-type: none"> <li>• Reducing cost of nuisance calls</li> <li>• Extending life of your equipment</li> <li>• Reducing potential service costs</li> <li>• Maintaining your equipment to original standards, energy efficiency and temperature control</li> <li>• Having confidence in what your contractor is fixing</li> </ul>
Slim profile, lighter weight and optional wall mount capability	<ul style="list-style-type: none"> <li>• Lower installation costs</li> <li>• Improved appearance of your enterprise site</li> <li>• Avoids more costly solutions for potential location issues</li> </ul>
Sound improvement	<ul style="list-style-type: none"> <li>• Creating a more comfortable environment for guests</li> <li>• Beneficial for regions with noise ordinances</li> </ul>

## Nomenclature

Z	X	L	0	2	0	E	-	T	F	D	-	4	5	1
Unit Family	Blank = Medium Temp B = Medium Temp (R134a) D = Digital/Medium Temp L = Low Temp	1.5 to 7.6 HP	E = Ester Oil O = Mineral Oil	PFJ = 220V/240V- 1ph- 50 Hz TFD = 380V/420V- 3ph- 50 Hz TF5 = 200V/230V- 3ph- 60 Hz 200V/220V - 3ph - 50 Hz TF7=380 - 3ph - 60 Hz	Bill of Material	Base Model	Electrical Code	Bill of Material						



## Bill of Material

CDU Family	ZX			ZXB			ZXL				ZXD		
	401	451	481	401	451	461	451	461	471	481	450	451	461
Liquid Line Filter Dryer/Sight Glass	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Oil Separator		✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓
Accumulator							✓	✓	✓	✓			
Adjustable LP Switch	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
Fixed LP Switch	✓	✓	✓								✓	✓	✓
E2 Controller	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
Digital Scroll™ Controller											✓	✓	✓
Fan Speed Controller	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓
Intelligent Store Solution Module	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
Circuit Breaker	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Sound Jacket	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Low Ambient Kit			✓								✓		
Defrost Module	ACC	ACC		ACC	ACC	✓	ACC	✓	ACC				
Filter Drier									ACC				


Note: ACC - Accessory

# Electronic Controller Assembly on a ZX Platform CDU

## ZX/ZXB/ZXL Controller Assembly

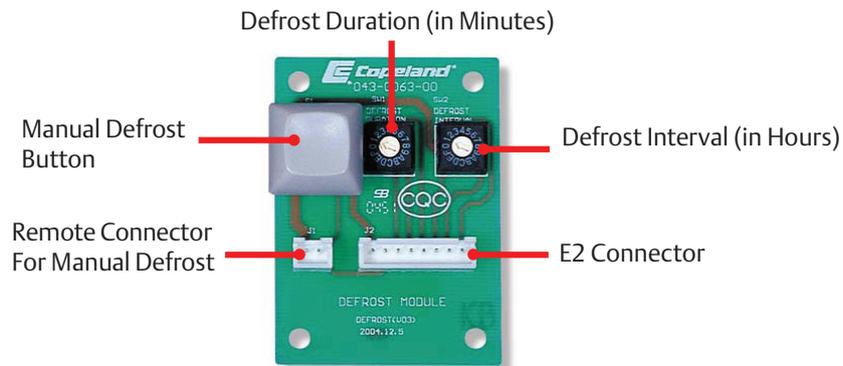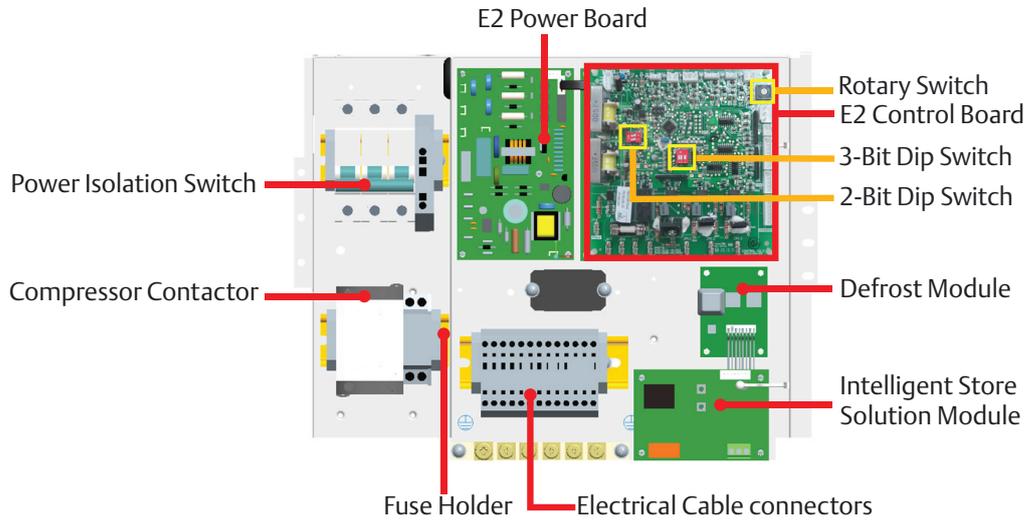

**Defrost Module**

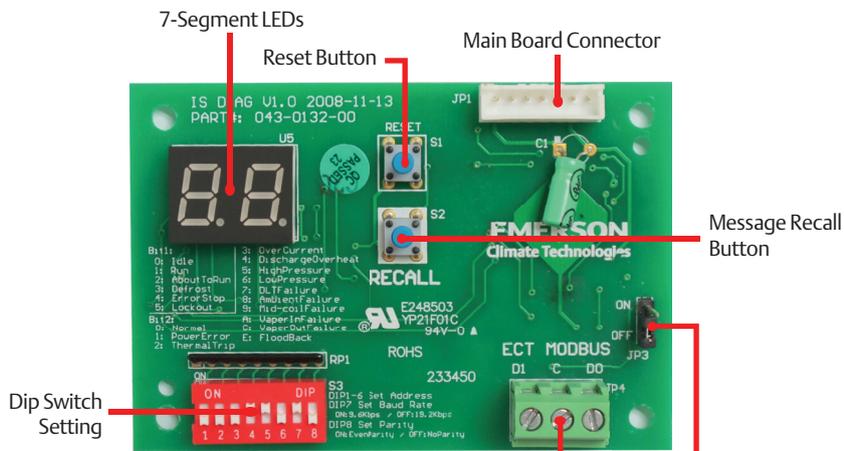


ModBus Connector	XWeb Connection	E2 Facility Manager
D0	RS485+	RS485-
D1	RS485-	RS485+

JP3 Termination Resistor Jumper  
 ON: Termination Resistor is Enabled  
 OFF: Termination Resistor is Disabled

**Intelligent Store™ Solution Module**

# Power Board and E2 Control Board Diagram

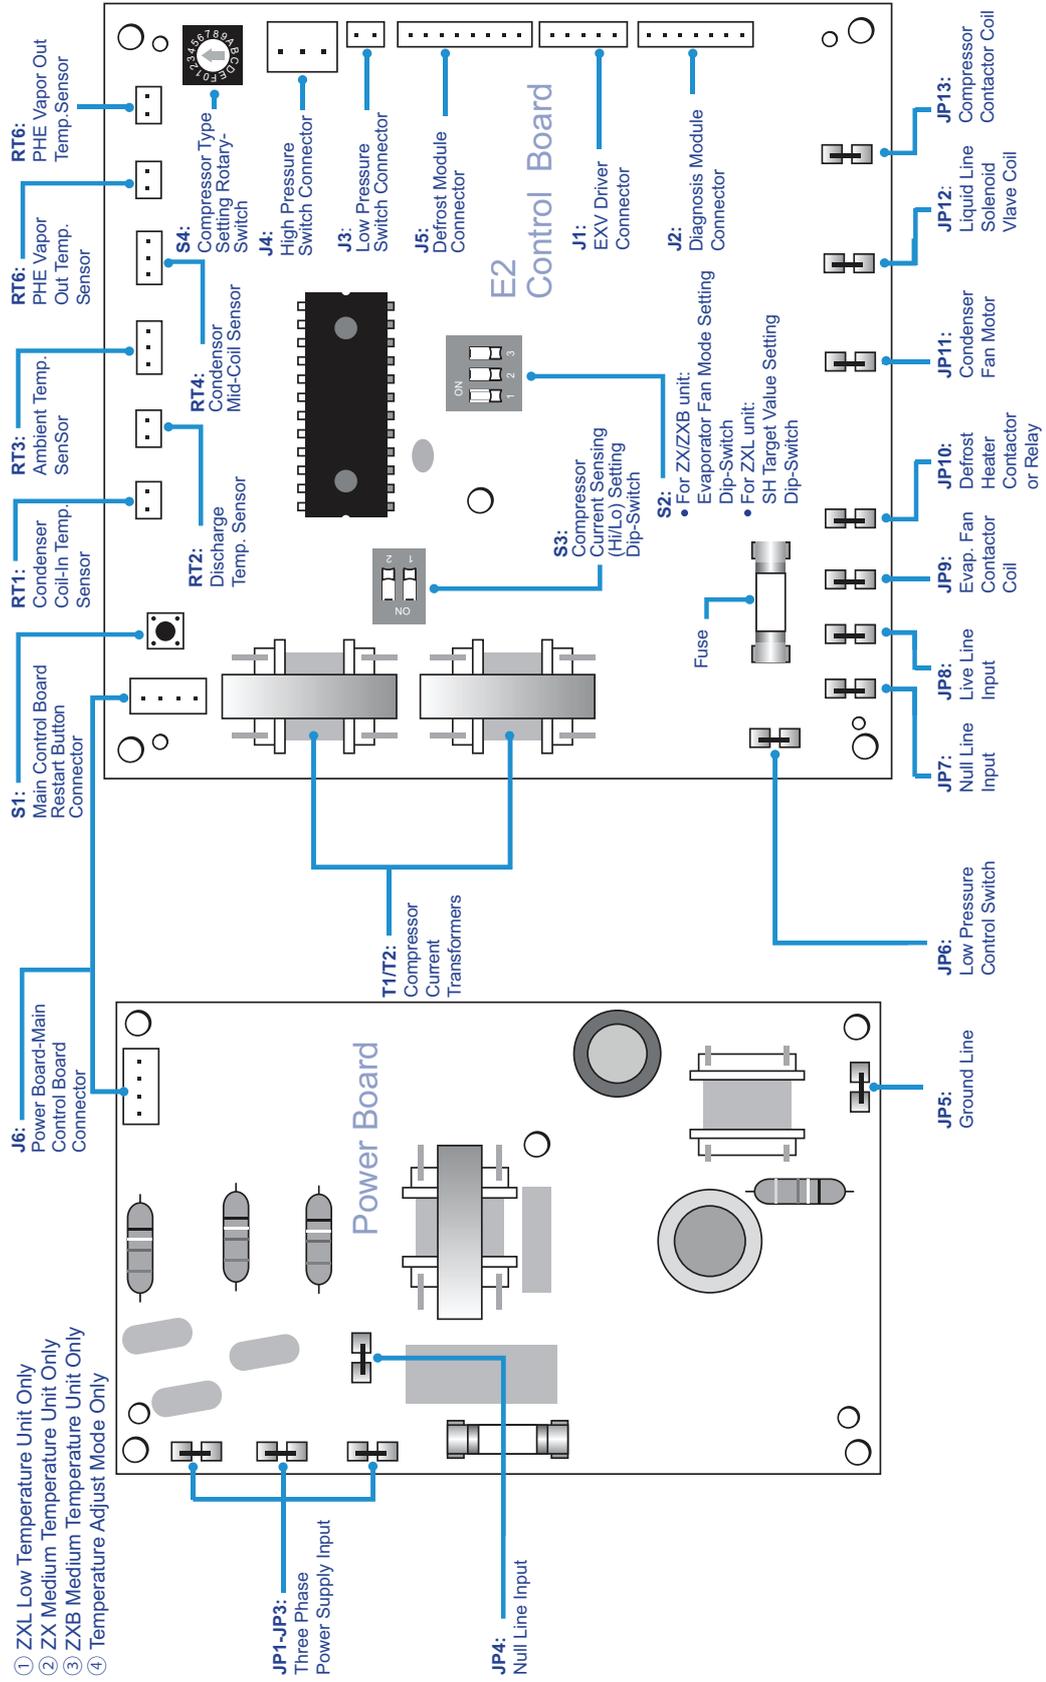

# ZXD Controller Assembly

Suction pressure  
Suction temperature display

Enter Alarm

Manual Restart


Setup Menu

EMERSON

Discharge pressure  
Condenser temperature display

**Program Mode:** browses parameter codes or increase value  
**Hot Key Insert :** Hot key programming procedure  
**INFO Menu:** Press and release it to access INFO Menu  
**Program Mode:** below parameter codes or decrease value  
**Maintenance /Clock**

## Emerson Controller On ZXD

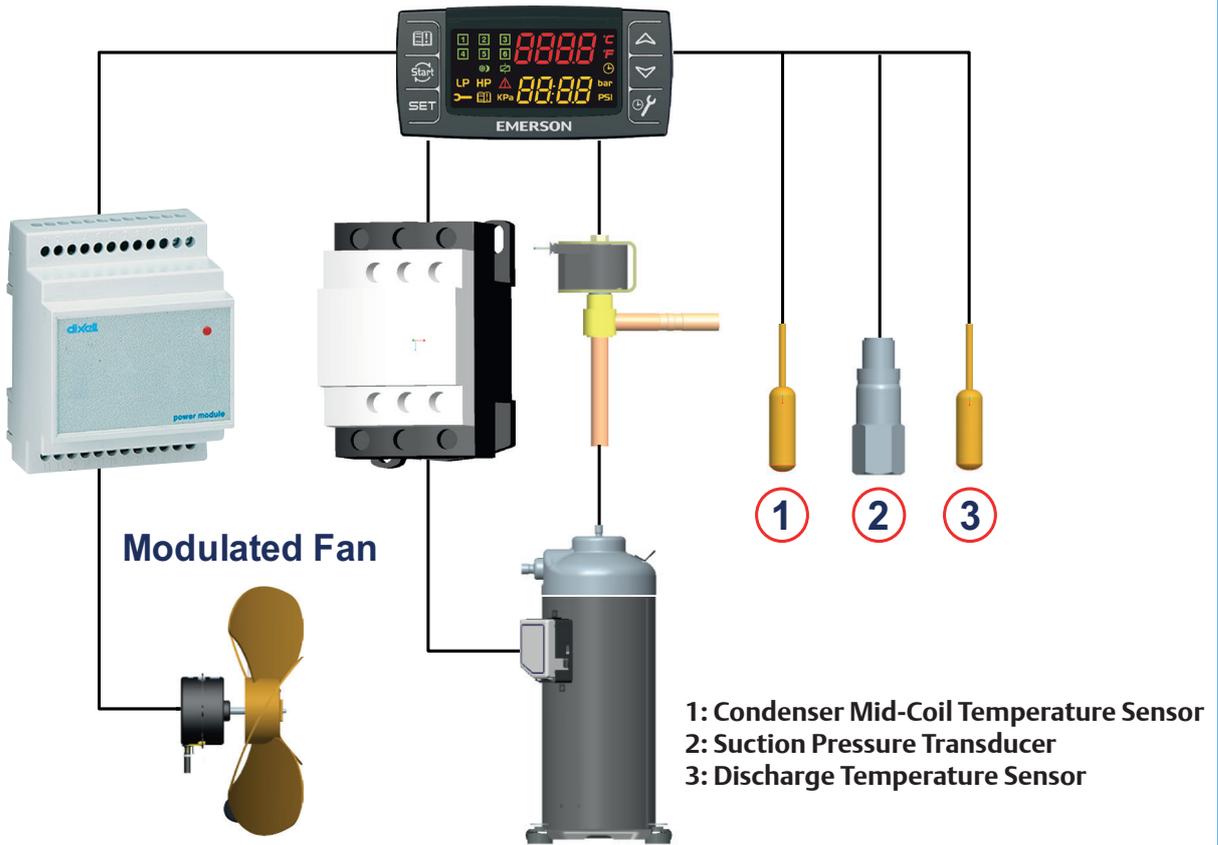


# Operating Envelopes

## ZX Family : Medium Temperature

ZX Medium Temperature at 50 Hz - PFJ / TFD / TF5


Refrigerant – R404A, R22, R407F  
Maximum Suction Gas Temperature: 20°C

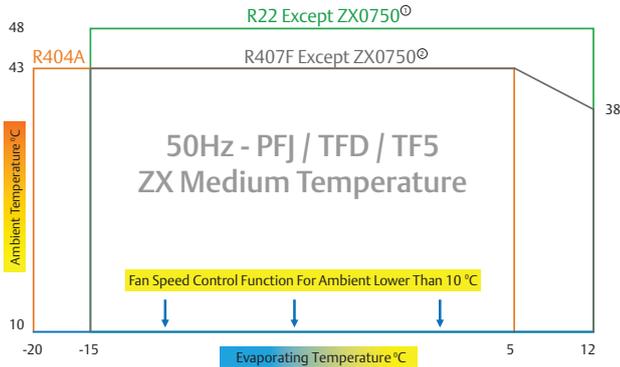

NoteⓄ: For model ZX0750 (R22) Max Amb: 43°C, Max Evap: 5°C  
NoteⓄ: For model ZX0750 (R407F) Max Evap: 5°C

ZX Medium Temperature at 60 Hz - TF5/7


Refrigerant – R404A, R22, R407F  
Maximum Suction Gas Temperature: 20°C

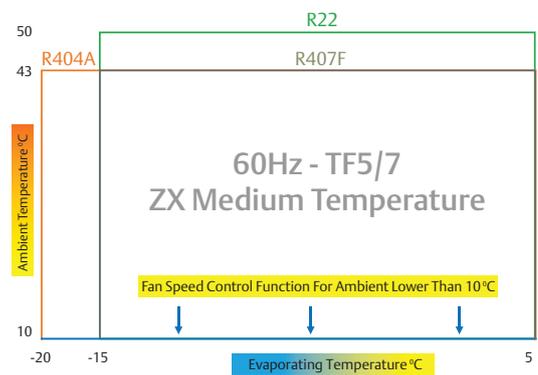

## ZXB Family : Medium Temperature


ZXB Medium Temperature at 50 Hz - TFD/TF5

Refrigerant – R134a  
Maximum Suction Gas Temperature: 20°C

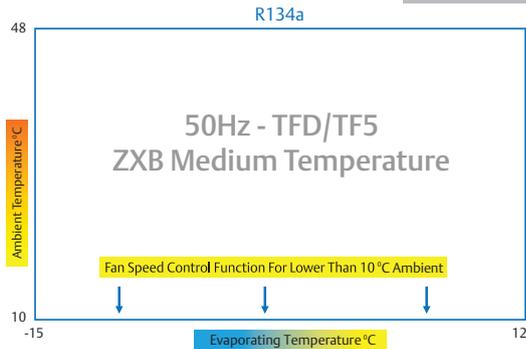

ZXB Medium Temperature 60 Hz-TF5/7


Refrigerant – R134a  
Maximum Suction Gas Temperature: 20°C

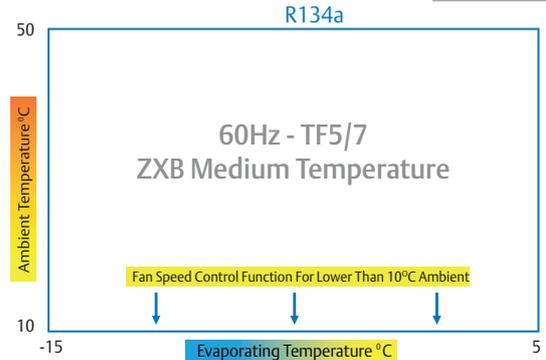

## ZXD Family : Digital Medium Temperature

ZXD Digital Medium Temperature at 50 Hz - TFD/TF5  
at 60 Hz - TF7

Refrigerant – R404A, R22, R407F  
Maximum Suction Gas Temperature: 20°C

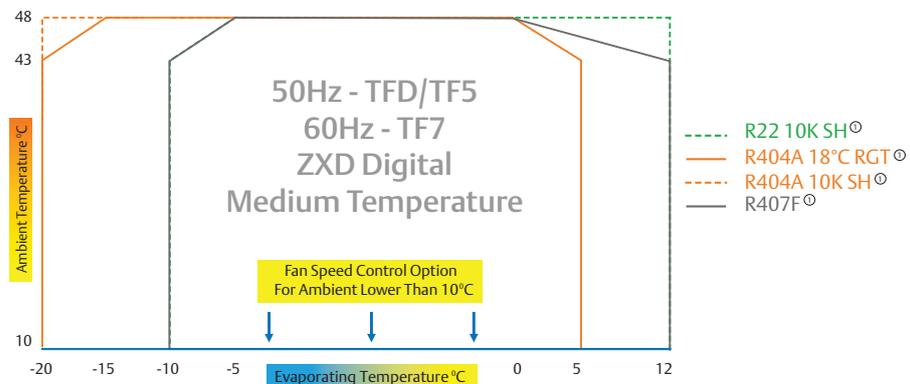


NoteⓄ: For model ZXD075/E Max Amb: 43°C, Max Evap: 5°C


# Operating Envelopes

## ZXL Family : Low Temperature


ZXL Low Temperature at 50 Hz - TFD/TF5 Refrigerant - R404A, R22, R407F  
Maximum Suction Gas Temperature: 20 °C

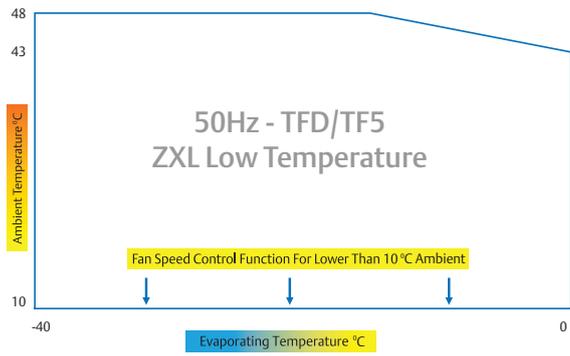

ZXL Low Temperature at 60 Hz - TF5/7 Refrigerant - R404A, R22, R407F  
Maximum Suction Gas Temperature: 20 °C

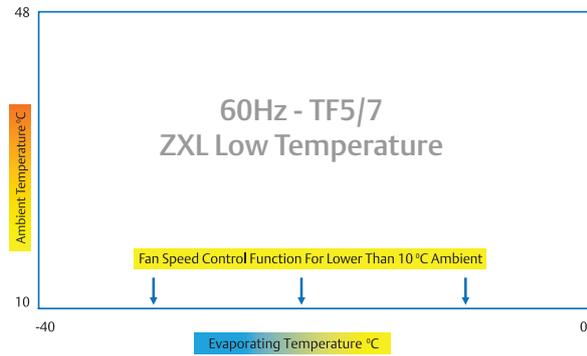

## Guideline for Using Low Ambient Units

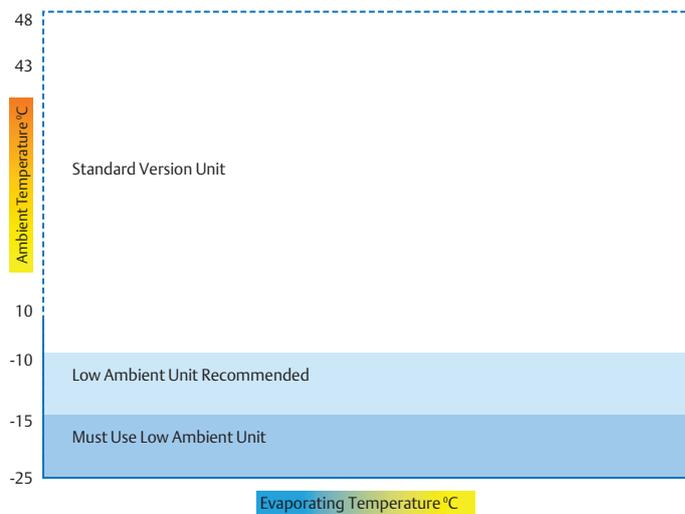

Note: For applications under -25°C ambient temperature, please contact Application Engineering.

# ZX Family: Medium Temperature

## Capacity and Power (kW) at 50 Hz - PFJ/TFD/TF5

# R22

Model	Ambient Temperature (°C)	Capacity Evaporating Temperature (°C)							Power Evaporating Temperature (°C)						
		-15	-10	-5	0	5	10	12	-15	-10	-5	0	5	10	12
ZX0200	27	2.84	3.61	4.18	4.95	5.87	7.03	7.45	1.33	1.37	1.41	1.47	1.53	1.70	1.79
	32	2.65	3.33	4.01	4.75	5.61	6.54	6.96	1.45	1.50	1.58	1.64	1.71	1.84	1.88
	38	2.38	3.11	3.81	4.55	5.37	6.19	6.68	1.62	1.74	1.83	1.87	1.91	2.03	2.08
	43	1.93	2.74	3.48	4.23	5.06	5.99	6.33	1.78	1.83	1.95	2.05	2.11	2.20	2.25
	48	1.68	2.30	3.18	3.87	4.69	5.51	5.80	2.21	2.31	2.44	2.51	2.54	2.55	2.64
ZX0250 <sup>1</sup>	27	3.52	4.17	4.96	5.91	7.07	8.44	9.06	1.43	1.49	1.55	1.60	1.62	1.60	1.58
	32	3.35	4.02	4.79	5.68	6.73	7.96	8.50	1.59	1.64	1.69	1.75	1.78	1.79	1.78
	38	2.92	3.65	4.43	5.29	6.25	7.33	7.81	1.89	1.92	1.96	2.01	2.06	2.08	2.08
	43	2.39	3.20	4.02	4.88	5.79	6.79	7.22	2.22	2.22	2.24	2.29	2.33	2.37	2.37
	48	1.70	2.62	3.51	4.39	5.28	6.22	6.61	2.59	2.55	2.56	2.58	2.62	2.66	2.67
ZX0300	27	4.30	5.20	6.28	7.57	9.09	10.22	10.80	1.95	2.04	2.17	2.20	2.23	2.43	2.49
	32	4.12	4.90	5.95	7.28	8.69	9.79	10.31	2.10	2.20	2.32	2.34	2.46	2.70	2.77
	38	3.68	4.62	5.65	6.85	8.29	9.06	9.63	2.37	2.48	2.59	2.60	2.76	3.06	3.12
	43	3.27	4.22	5.27	6.50	7.97	8.63	9.08	2.64	2.75	2.84	2.94	3.04	3.32	3.36
	48	2.40	3.55	4.65	5.67	6.86	7.97	8.50	2.98	3.18	3.28	3.35	3.50	3.64	3.69
ZX0400	27	5.98	7.20	8.57	10.03	11.54	13.82	14.64	2.64	2.71	2.83	2.98	3.08	3.34	3.36
	32	5.46	6.73	8.13	9.62	11.16	13.01	13.85	2.81	2.90	3.06	3.19	3.33	3.68	3.68
	38	4.72	6.01	7.42	8.93	10.48	12.09	13.04	3.08	3.27	3.39	3.49	3.65	4.09	4.07
	43	4.09	5.37	6.78	8.27	9.80	11.61	12.25	3.29	3.52	3.68	3.80	3.95	4.38	4.39
	48	3.55	4.50	6.20	7.57	9.08	10.68	11.23	4.16	4.46	4.49	4.72	4.80	5.07	5.18
ZX0500 <sup>2</sup>	27	7.13	8.76	10.44	12.22	14.12	17.28	18.22	2.88	3.03	3.18	3.29	3.47	4.16	4.28
	32	6.77	8.31	9.96	11.72	13.68	16.62	17.47	3.37	3.35	3.57	3.67	3.97	4.50	4.58
	38	6.24	7.69	9.28	11.06	13.06	15.31	16.34	3.77	3.87	4.07	4.27	4.47	4.98	5.10
	43	5.44	6.80	8.36	10.15	12.21	14.60	15.47	4.27	4.27	4.47	4.66	4.96	5.46	5.56
	48	3.96	5.80	7.62	9.49	11.47	13.49	14.40	5.14	5.21	5.44	5.61	5.80	6.01	6.04
ZX0600 <sup>2</sup>	27	8.50	10.41	12.49	14.72	17.66	19.64	20.60	3.51	3.70	3.88	4.16	4.43	4.98	5.32
	32	7.71	9.93	11.71	13.94	16.30	18.87	20.10	3.88	4.07	4.25	4.43	4.71	5.29	5.47
	38	6.81	8.42	10.57	12.85	15.26	17.77	18.92	4.34	4.53	4.71	4.90	5.08	5.86	5.98
	43	5.91	7.23	9.40	11.78	14.26	16.33	17.86	4.90	5.17	5.45	5.64	5.73	6.57	6.66
	48	4.97	7.00	9.25	11.15	13.08	15.09	16.06	6.02	6.22	6.46	6.69	6.96	7.22	7.45
ZX0750 <sup>2</sup>	27	10.03	12.20	14.41	17.23	20.87			4.34	4.54	4.76	4.98	5.22		
	32	9.45	11.24	13.90	16.63	20.21			4.77	4.95	5.19	5.51	5.91		
	38	8.83	10.85	13.25	15.50	19.42			5.36	5.53	5.83	6.25	6.80		
	43	8.18	10.00	12.29	14.30	18.49			5.95	6.10	6.43	6.93	7.62		
ZX0760 <sup>2</sup>	27	10.23	12.44	14.70	17.60	21.29	25.49	27.01	4.25	4.45	4.66	4.88	5.12	5.47	5.64
	32	9.64	11.46	14.18	16.96	20.61	24.03	25.58	4.67	4.85	5.09	5.40	5.79	5.86	5.97
	38	9.01	11.07	13.52	15.80	19.81	22.85	24.65	5.26	5.42	5.72	6.12	6.67	6.64	6.81
	43	8.34	10.20	12.54	14.60	18.86	22.34	23.57	5.83	5.98	6.30	6.79	7.47	7.34	7.48
	48	7.24	8.55	11.46	14.09	17.47	20.55	21.61	6.79	7.04	7.40	7.89	8.43	8.74	8.78

Notes: <sup>1</sup> Available on PFJ models only  
<sup>2</sup> Available on TFD models only  
The rating condition is based on a return gas temperature of 18.3°C.  
Power includes condenser fan.  
Ambient 38°C and 43°C are typical design conditions for unit selection.

# ZX Family: Medium Temperature

## Capacity and Power (kW) at 60 Hz - TF5/TF7

# R22

Model	Ambient Temperature (°C)	Capacity Evaporating Temperature (°C)					Power Evaporating Temperature (°C)				
		-15	-10	-5	0	5	-15	-10	-5	0	5
ZX0200	27	3.62	4.42	5.36	6.43	7.59	1.69	1.71	1.69	1.69	1.71
	32	3.41	4.22	5.17	6.20	7.29	1.89	1.91	1.90	1.89	1.90
	38	2.88	3.77	4.75	5.78	6.84	2.13	2.17	2.17	2.17	2.18
	43	2.20	3.19	4.24	5.31	6.38	2.35	2.41	2.42	2.43	2.45
	48	1.30	2.43	3.58	4.73	5.84	2.59	2.67	2.71	2.73	2.75
	50	0.88	2.07	3.27	4.46	5.60	2.69	2.78	2.83	2.85	2.89
ZX0300	27	5.12	6.20	7.29	8.90	10.54	2.42	2.53	2.69	2.73	2.77
	32	4.91	5.84	6.98	8.48	10.00	2.60	2.73	2.88	2.90	3.05
	38	4.39	5.51	6.53	7.96	9.38	2.94	3.08	3.21	3.22	3.42
	43	3.90	5.03	5.94	7.35	8.74	3.27	3.41	3.52	3.65	3.77
	48	2.86	4.23	5.01	6.45	7.86	3.70	3.94	4.07	4.15	4.34
	50	2.45	3.12	4.51	5.98	7.40	3.86	4.16	4.29	4.36	4.57
ZX0400	27	7.36	8.83	10.52	12.37	14.31	3.25	3.35	3.52	3.75	4.02
	32	7.06	8.54	10.21	12.02	13.92	3.55	3.63	3.79	4.01	4.28
	38	6.37	7.87	9.55	11.34	13.20	4.05	4.11	4.26	4.48	4.75
	43	5.62	7.16	8.86	10.66	12.50	4.55	4.60	4.73	4.95	5.22
	48	4.82	6.41	8.14	9.96	11.81	5.09	5.12	5.25	5.46	5.74
	50	4.50	6.12	7.87	9.70	11.55	5.30	5.33	5.46	5.67	5.95
ZX0500	27	8.55	10.51	12.53	14.66	16.95	3.54	3.72	3.91	4.05	4.27
	32	8.12	9.97	11.95	14.06	16.42	4.15	4.13	4.39	4.52	4.88
	38	7.49	9.23	11.14	13.28	15.68	4.64	4.76	5.00	5.25	5.49
	43	6.53	8.16	10.03	12.18	14.65	5.25	5.25	5.49	5.74	6.10
	48	4.75	6.96	9.14	11.39	13.76	6.33	6.40	6.69	6.90	7.13
	50	4.04	6.48	8.79	11.07	13.41	6.76	6.87	7.16	7.37	7.55
ZX0600	27	10.20	12.49	14.99	17.66	21.19	4.39	4.62	4.85	5.20	5.54
	32	9.25	11.92	14.05	16.73	19.56	4.85	5.08	5.31	5.54	5.89
	38	8.17	10.10	12.68	15.42	18.31	5.43	5.66	5.89	6.12	6.35
	43	7.09	8.68	11.28	14.14	17.11	6.12	6.47	6.81	7.04	7.16
	48	5.96	8.40	11.10	13.38	15.70	7.53	7.77	8.07	8.37	8.70
	50	5.51	8.29	11.03	13.08	15.13	8.09	8.16	8.44	8.75	9.00
ZX0750	27	11.25	14.06	16.61	19.89	24.05	5.10	5.34	5.59	5.86	6.14
	32	10.60	12.95	16.02	19.16	23.29	5.60	5.82	6.11	6.48	6.95
	38	9.91	12.51	15.28	17.85	22.38	6.31	6.51	6.86	7.35	8.00
	43	9.18	11.53	14.17	16.50	21.31	7.00	7.17	7.56	8.15	8.96
	48	7.96	9.66	12.95	15.92	19.74	8.15	8.45	8.88	9.47	10.12
	50	7.48	8.92	12.46	15.69	19.11	8.61	8.96	9.41	10.00	10.58

**Note:** The rating condition is based on a return gas temperature of 18.3°C.  
 Power includes condenser fan.  
 Ambient 38°C and 43°C are typical design conditions for unit selection.

# ZX Family: Medium Temperature

## Capacity and Power (kW) at 50 Hz - PFJ/TFD/TF5

# R404A

Model	Ambient Temperature (°C)	Capacity Evaporating Temperature (°C)						Power Evaporating Temperature (°C)					
		-20	-15	-10	-5	0	5	-20	-15	-10	-5	0	5
ZX020E	27	3.30	3.90	4.44	5.08	5.79	6.60	1.64	1.67	1.70	1.76	1.84	1.96
	32	2.85	3.39	3.92	4.48	5.08	5.76	1.79	1.81	1.84	1.90	2.00	2.12
	38	2.42	2.90	3.36	3.85	4.36	4.94	1.95	1.99	2.02	2.07	2.16	2.26
	43	1.94	2.43	2.89	3.34	3.81	4.30	2.14	2.18	2.22	2.27	2.34	2.41
ZX025E <sup>1</sup>	27	3.22	3.95	4.67	5.45	6.37	7.50	1.71	1.76	1.79	1.84	1.90	1.96
	32	2.96	3.68	4.36	5.09	5.95	7.00	1.93	1.96	2.00	2.04	2.08	2.13
	38	2.61	3.31	3.96	4.64	5.41	6.37	2.19	2.23	2.26	2.29	2.32	2.35
	43	1.96	2.64	3.26	3.89	4.61	5.48	2.59	2.65	2.69	2.71	2.73	2.76
ZX030E	27	4.04	4.87	5.81	6.85	7.99	9.23	2.14	2.19	2.24	2.32	2.42	2.55
	32	3.75	4.52	5.39	6.35	7.40	8.55	2.40	2.44	2.50	2.57	2.67	2.81
	38	3.39	4.08	4.85	5.72	6.67	7.69	2.72	2.75	2.80	2.88	3.00	3.15
	43	3.06	3.69	4.39	5.17	6.03	6.97	3.06	3.09	3.14	3.21	3.33	3.50
ZX040E	27	5.52	6.57	7.70	8.95	10.37	12.02	2.72	2.86	3.02	3.17	3.31	3.36
	32	5.10	6.10	7.13	8.24	9.47	10.87	3.03	3.15	3.31	3.46	3.54	3.68
	38	4.61	5.60	6.57	7.57	8.64	9.85	3.45	3.58	3.71	3.85	3.97	4.03
	43	3.98	5.00	5.95	6.89	7.83	8.85	3.87	4.00	4.12	4.23	4.33	4.38
ZX050E <sup>2</sup>	27	7.49	9.05	10.67	12.31	13.93	15.51	3.65	3.73	3.86	4.02	4.25	4.53
	32	6.56	8.12	9.76	11.43	13.10	14.74	4.11	4.20	4.32	4.50	4.72	5.00
	38	5.56	7.07	8.67	10.32	11.98	13.63	4.59	4.68	4.79	4.96	5.16	5.42
	43	4.88	6.28	7.79	9.37	10.98	12.58	5.11	5.17	5.27	5.40	5.59	5.81
ZX060E <sup>2</sup>	27	8.24	9.72	11.47	13.30	15.69	18.48	3.69	3.84	4.06	4.33	4.62	4.93
	32	7.53	9.06	10.72	12.58	14.72	17.20	4.40	4.54	4.75	5.01	5.28	5.56
	38	6.74	8.25	9.83	11.55	13.48	15.69	4.93	5.05	5.25	5.47	5.72	5.98
	43	5.90	7.48	9.07	10.74	12.57	14.63	5.59	5.69	5.85	6.06	6.28	6.51
ZX075E <sup>2</sup>	27	9.04	10.86	12.75	15.07	17.76	20.13	4.08	4.26	4.50	4.80	5.13	5.46
	32	8.33	10.01	11.82	13.86	16.20	18.92	4.88	5.03	5.27	5.54	5.86	6.17
	38	7.30	8.74	10.62	12.47	14.54	16.92	5.46	5.61	5.82	6.06	6.35	6.63
	43	6.26	7.93	9.61	11.38	13.32	15.50	6.20	6.32	6.49	6.71	6.96	7.22
ZX076E <sup>2</sup>	27	9.22	11.07	13.00	15.37	18.12	20.53	4.00	4.17	4.41	4.70	5.03	5.35
	32	8.50	10.21	12.06	14.14	16.53	19.30	4.78	4.93	5.16	5.43	5.74	6.05
	38	7.45	8.91	10.83	12.72	14.83	17.26	5.35	5.50	5.70	5.94	6.22	6.50
	43	6.39	8.09	9.80	11.61	13.59	15.81	6.07	6.19	6.36	6.57	6.82	7.07

**Notes:** <sup>1</sup> Available on PFJ models only  
<sup>2</sup> Available on TFD models only  
The rating condition is based on a return gas temperature of 18.3°C.  
Power includes condenser fan.  
Ambient 38°C and 43°C are typical design conditions for unit selection.

# ZX Family: Medium Temperature

## Capacity and Power (kW) at 60 Hz - TF5/TF7

# R404A

Model	Ambient Temperature (°C)	Capacity Evaporating Temperature (°C)						Power Evaporating Temperature (°C)					
		-20	-15	-10	-5	0	5	-20	-15	-10	-5	0	5
ZX020E	27	3.50	4.26	4.98	5.77	6.71	7.89	1.84	1.87	1.90	1.95	2.00	2.05
	32	3.15	3.94	4.66	5.40	6.25	7.30	2.09	2.10	2.12	2.16	2.20	2.24
	38	2.69	3.52	4.24	4.93	5.69	6.60	2.42	2.42	2.44	2.47	2.50	2.54
	43	2.22	3.09	3.82	4.48	5.17	5.97	2.71	2.71	2.73	2.76	2.81	2.85
ZX030E	27	5.02	5.98	7.05	8.17	9.29	10.36	2.69	2.80	2.92	3.05	3.17	3.29
	32	4.62	5.56	6.63	7.75	8.88	9.97	2.98	3.06	3.16	3.26	3.36	3.45
	38	4.14	5.02	6.02	7.10	8.18	9.23	3.38	3.46	3.55	3.65	3.75	3.85
	43	3.78	4.56	5.47	6.46	7.47	8.44	3.74	3.84	3.95	4.08	4.21	4.33
ZX040E	27	6.71	8.02	9.60	11.30	13.00	14.59	3.72	3.79	3.89	3.99	4.10	4.18
	32	6.46	7.70	9.20	10.81	12.42	13.90	3.84	3.92	4.02	4.14	4.26	4.35
	38	5.90	7.05	8.45	9.95	11.43	12.76	4.32	4.40	4.50	4.62	4.74	4.84
	43	5.36	6.43	7.73	9.12	10.49	11.69	4.89	4.95	5.05	5.16	5.27	5.37
ZX050E	27	8.10	9.70	11.55	13.54	15.53	17.38	4.42	4.63	4.86	5.11	5.35	5.57
	32	8.05	9.56	11.33	13.21	15.09	16.83	4.59	4.78	4.99	5.22	5.45	5.66
	38	7.46	8.86	10.50	12.25	13.99	15.58	5.10	5.27	5.48	5.70	5.93	6.13
	43	6.81	8.10	9.63	11.26	12.88	14.33	5.62	5.80	6.01	6.24	6.47	6.69
ZX060E	27	9.84	11.77	13.96	16.31	18.74	21.15	5.06	5.24	5.49	5.76	6.01	6.20
	32	9.25	11.09	13.16	15.36	17.60	19.79	5.39	5.58	5.82	6.09	6.35	6.55
	38	8.30	10.09	12.06	14.13	16.19	18.16	6.09	6.25	6.48	6.74	6.99	7.19
	43	7.32	9.11	11.04	13.03	14.98	16.82	6.82	6.96	7.17	7.41	7.65	7.83
ZX075E	27	11.16	13.39	14.92	17.64	19.93	22.58	4.80	5.00	5.69	6.06	6.54	6.96
	32	10.29	12.35	13.84	16.23	18.18	21.23	5.74	5.92	6.66	7.00	7.46	7.87
	38	9.01	10.78	12.43	14.60	16.31	18.99	6.42	6.60	7.35	7.66	8.09	8.45
	43	7.73	9.79	11.25	13.33	14.95	17.39	7.28	7.43	8.20	8.48	8.87	9.19

**Note:** The rating condition is based on a return gas temperature of 18.3°C.  
 Power includes condenser fan.  
 Ambient 38°C and 43°C are typical design conditions for unit selection.

# ZX Family: Medium Temperature

## Capacity and Power (kW) at 50 Hz - PFJ/TFD/TF5

# R407F

Model	Ambient Temperature (°C)	Capacity Evaporating Temperature (°C)							Power Evaporating Temperature (°C)						
		-15	-10	-5	0	5	10	12	-15	-10	-5	0	5	10	12
ZX020E	27	3.63	4.32	5.07	5.79	6.45	7.24	7.62	1.55	1.67	1.76	1.87	1.99	2.06	2.14
	32	3.36	3.98	4.69	5.39	6.07	6.90	7.30	1.77	1.85	1.93	2.05	2.22	2.35	2.46
	38	2.79	3.35	4.02	4.74	5.46	6.35	6.78	2.11	2.18	2.27	2.44	2.70	2.92	3.06
	43	2.21	2.74	3.40	4.14	4.91			2.40	2.48	2.61	2.84	3.20		
ZX025E	27	3.91	4.83	5.80	6.82	7.91	9.05	9.53	1.72	1.85	1.92	1.96	2.00	2.09	2.14
	32	3.63	4.45	5.35	6.35	7.44	8.63	9.13	1.97	2.05	2.10	2.15	2.23	2.38	2.46
	38	3.01	3.74	4.59	5.58	6.69	7.94	8.48	2.35	2.41	2.47	2.56	2.71	2.96	3.09
	43	2.39	3.06	3.88	4.87	6.03			2.67	2.74	2.83	2.98	3.22		
ZX030E	27	5.01	6.13	7.30	8.53	9.88	11.32	11.91	2.20	2.39	2.47	2.58	2.64	2.78	2.85
	32	4.64	5.65	6.75	7.94	9.31	10.79	11.41	2.44	2.63	2.67	2.77	2.97	3.16	3.27
	38	3.85	4.75	5.79	6.97	8.37	9.93	10.60	2.86	3.00	3.11	3.23	3.57	3.90	4.07
	43	3.06	3.88	4.89	6.09	7.53			3.11	3.28	3.43	3.49	4.03		
ZX040E	27	6.81	8.21	9.64	11.09	12.65	14.37	15.13	2.87	3.18	3.26	3.38	3.41	3.57	3.66
	32	6.31	7.57	8.91	10.33	11.91	13.70	14.49	3.18	3.49	3.53	3.64	3.84	4.06	4.20
	38	5.24	6.36	7.64	9.07	10.71	12.61	13.46	3.72	3.98	4.10	4.24	4.61	5.01	5.23
	43	4.16	5.20	6.46	7.92	9.64			4.04	4.36	4.53	4.59	5.21		
ZX050E	27	8.11	10.02	11.73	13.53	15.71	18.56	19.95	3.62	3.70	3.92	4.20	4.46	4.62	4.64
	32	7.42	9.44	11.19	12.96	15.04	17.74	19.05	4.07	4.16	4.39	4.69	4.96	5.14	5.16
	38	6.32	8.44	10.22	11.95	13.91	16.41	17.61	4.61	4.71	4.95	5.26	5.54	5.73	5.76
	43	5.32	7.53	9.33	11.01	12.87			5.12	5.22	5.46	5.77	6.06		
ZX060E	27	9.24	11.22	13.02	15.16	18.23	21.53	23.15	3.93	3.87	4.07	4.36	4.79	4.96	4.98
	32	8.46	10.57	12.42	14.51	17.45	20.57	22.09	4.50	4.48	4.62	5.00	5.38	5.57	5.60
	38	7.20	9.45	11.35	13.38	16.14	19.03	20.43	5.05	5.02	5.19	5.50	6.07	6.27	6.30
	43	6.07	8.44	10.36	12.33	14.93			5.56	5.51	5.66	5.98	6.44		
ZX075E	27	10.07	12.23	14.19	16.52	19.68			4.32	4.22	4.39	4.65	5.08		
	32	9.23	11.52	13.53	15.82	18.85			4.92	4.89	5.04	5.47	5.81		
	38	7.85	10.31	12.37	14.59	17.43			5.68	5.64	5.80	6.16	6.74		
	43	6.62	9.20	11.29	13.45	16.12			6.38	6.29	6.46	6.81	7.28		
ZX076E	27	10.28	12.48	14.48	16.85	20.08	23.72	25.50	4.44	4.31	4.43	4.64	5.08	5.26	5.28
	32	9.41	11.75	13.80	16.14	19.23	22.66	24.34	5.03	5.01	5.14	5.60	5.93	6.14	6.16
	38	8.01	10.51	12.62	14.88	17.78	20.96	22.51	5.97	5.94	6.07	6.44	7.08	7.34	7.38
	43	6.75	9.38	11.52	13.71	16.44			6.84	6.72	6.90	7.26	7.76		

**Notes:** The rating condition is based on a return gas temperature of 18.3°C.  
 Power includes condenser fan.  
 Ambient 38°C and 43°C are typical design conditions for unit selection.

# ZX Family: Medium Temperature

Capacity and Power (kW) at 60 Hz - TF5/TF7

# R407F

Model	Ambient Temperature (°C)	Capacity Evaporating Temperature (°C)					Power Evaporating Temperature (°C)				
		-15	-10	-5	0	5	-15	-10	-5	0	5
ZX020E	27	4.51	5.36	6.27	7.14	7.92	2.01	2.11	2.20	2.28	2.41
	32	4.17	4.93	5.78	6.63	7.44	2.29	2.33	2.41	2.50	2.68
	38	3.45	4.13	4.95	5.81	6.68	2.73	2.74	2.83	2.97	3.25
	43	2.73	3.37	4.18	5.07	6.00	3.10	3.11	3.24	3.45	3.85
ZX030E	27	6.23	7.60	9.03	10.51	12.14	2.86	3.02	3.08	3.15	3.19
	32	5.76	6.99	8.32	9.77	11.41	3.17	3.31	3.33	3.38	3.58
	38	4.77	5.86	7.13	8.56	10.24	3.70	3.76	3.87	3.93	4.30
	43	3.78	4.78	6.01	7.46	9.20	4.01	4.11	4.26	4.24	4.84
ZX040E	27	8.47	10.18	11.91	13.66	15.54	3.72	4.01	4.07	4.13	4.12
	32	7.83	9.36	10.99	12.70	14.60	4.12	4.39	4.39	4.43	4.63
	38	6.49	7.85	9.41	11.13	13.11	4.82	5.00	5.10	5.16	5.56
	43	5.14	6.41	7.94	9.70	11.78	5.22	5.46	5.62	5.57	6.26
ZX050E	27	10.08	12.42	14.50	16.67	19.30	4.71	4.67	4.89	5.13	5.40
	32	9.21	11.68	13.80	15.94	18.45	5.27	5.23	5.47	5.71	5.99
	38	7.82	10.42	12.58	14.67	17.03	5.97	5.91	6.16	6.39	6.68
	43	6.58	9.28	11.47	13.49	15.71	6.61	6.54	6.77	7.00	7.28
ZX060E	27	11.49	13.91	16.09	18.68	22.39	5.11	4.88	5.08	5.32	5.80
	32	10.50	13.08	15.31	17.85	21.40	5.83	5.63	5.76	6.09	6.49
	38	8.92	11.67	13.97	16.43	19.75	6.54	6.31	6.45	6.69	7.31
	43	7.50	10.40	12.73	15.11	18.23	7.17	6.91	7.03	7.26	7.75
ZX075E	27	12.53	15.16	17.54	20.36	24.18	5.61	5.32	5.48	5.68	6.14
	32	11.45	14.25	16.69	19.45	23.11	6.38	6.16	6.28	6.67	7.01
	38	9.72	12.72	15.23	17.91	21.33	7.35	7.09	7.21	7.49	8.12
	43	8.18	11.33	13.87	16.47	19.69	8.23	7.89	8.02	8.27	8.75

**Note:** The rating condition is based on a return gas temperature of 18.3°C.  
 Power includes condenser fan.  
 Ambient 38°C and 43°C are typical design conditions for unit selection.

# ZXB Family: Medium Temperature

## Capacity and Power (kW) at 50 Hz - TFD/TF5

# R134a

Model	Ambient Temperature (°C)	Capacity Evaporating Temperature (°C)							Power Evaporating Temperature (°C)						
		-15	-10	-5	0	5	10	12	-15	-10	-5	0	5	10	12
ZXB015E	27	2.42	2.92	3.48	4.11	4.83	5.65	6.01	1.10	1.08	1.09	1.11	1.14	1.16	1.16
	32	2.37	2.87	3.42	4.03	4.72	5.52	5.86	1.20	1.18	1.18	1.21	1.25	1.28	1.29
	38	2.26	2.76	3.30	3.89	4.56	5.31	5.64	1.34	1.32	1.33	1.36	1.41	1.46	1.47
	43	2.14	2.64	3.18	3.76	4.40	5.13	5.44	1.49	1.47	1.48	1.52	1.58	1.64	1.66
	48	2.01	2.52	3.05	3.61	4.24	4.94	5.24	1.67	1.64	1.66	1.71	1.77	1.84	1.87
ZXB020E	27	2.74	3.41	4.14	4.94	5.78	6.67	7.03	1.08	1.07	1.10	1.14	1.19	1.23	1.25
	32	2.63	3.29	4.01	4.80	5.63	6.51	6.87	1.21	1.20	1.23	1.27	1.33	1.38	1.40
	38	2.47	3.12	3.84	4.61	5.43	6.29	6.64	1.38	1.38	1.41	1.46	1.52	1.58	1.60
	43	2.36	2.99	3.70	4.45	5.26	6.10	6.44	1.53	1.53	1.57	1.62	1.69	1.75	1.78
	48	2.27	2.90	3.58	4.32	5.10	5.92	6.25	1.69	1.69	1.73	1.78	1.85	1.93	1.95
ZXB025E	27	2.98	3.70	4.46	5.28	6.19	7.20	7.63	1.25	1.28	1.34	1.42	1.52	1.62	1.66
	32	2.89	3.59	4.33	5.14	6.02	7.00	7.43	1.37	1.41	1.48	1.56	1.66	1.75	1.79
	38	2.79	3.47	4.18	4.95	5.80	6.75	7.16	1.53	1.59	1.67	1.76	1.86	1.96	1.99
	43	2.72	3.37	4.05	4.79	5.61	6.52	6.91	1.67	1.75	1.85	1.96	2.07	2.17	2.20
	48	2.65	3.27	3.92	4.62	5.40	6.27	6.65	1.83	1.94	2.06	2.18	2.30	2.41	2.44
ZXB030E	27	3.74	4.53	5.45	6.49	7.66	8.95	9.49	1.50	1.54	1.62	1.73	1.83	1.93	1.96
	32	3.59	4.39	5.29	6.30	7.43	8.66	9.18	1.65	1.69	1.77	1.89	2.02	2.16	2.21
	38	3.43	4.22	5.10	6.08	7.15	8.31	8.80	1.85	1.87	1.96	2.09	2.25	2.43	2.50
	43	3.29	4.07	4.94	5.88	6.90	8.01	8.47	2.05	2.05	2.14	2.28	2.46	2.67	2.75
	48	3.14	3.91	4.75	5.66	6.64	7.67	8.11	2.30	2.29	2.36	2.51	2.70	2.94	3.03
ZXB035E	27	5.09	6.04	7.16	8.40	9.73	11.13	11.70	1.88	2.06	2.21	2.35	2.52	2.75	2.87
	32	4.93	5.88	6.97	8.17	9.46	10.81	11.35	2.02	2.23	2.40	2.56	2.75	3.00	3.13
	38	4.76	5.67	6.72	7.88	9.11	10.37	10.88	2.22	2.45	2.65	2.84	3.05	3.32	3.46
	43	4.61	5.50	6.51	7.61	8.78	9.97	10.45	2.42	2.69	2.90	3.11	3.34	3.64	3.78
	48	4.47	5.32	6.28	7.32	8.41	9.53	9.97	2.71	2.99	3.23	3.46	3.71	4.03	4.18
ZXB040E	27	5.48	6.65	7.93	9.34	10.88	12.55	13.26	2.19	2.22	2.33	2.49	2.70	2.95	3.05
	32	5.30	6.43	7.68	9.05	10.54	12.18	12.87	2.32	2.38	2.51	2.68	2.90	3.15	3.26
	38	5.11	6.18	7.38	8.69	10.13	11.71	12.38	2.53	2.62	2.77	2.95	3.17	3.42	3.52
	43	4.94	5.97	7.11	8.37	9.77	11.30	11.95	2.80	2.91	3.06	3.25	3.47	3.70	3.80
	48	4.76	5.73	6.82	8.03	9.36	10.84	11.47	3.18	3.31	3.47	3.66	3.87	4.09	4.18
ZXB050E	27	6.23	7.53	9.10	10.95	13.06	15.47	16.51	2.45	2.52	2.66	2.84	3.05	3.28	3.37
	32	6.21	7.52	9.07	10.86	12.90	15.19	16.18	2.72	2.83	2.99	3.19	3.42	3.65	3.74
	38	6.17	7.45	8.93	10.63	12.54	14.67	15.59	3.07	3.21	3.41	3.63	3.87	4.10	4.19
	43	6.01	7.24	8.65	10.23	12.01	13.98	14.82	3.34	3.52	3.73	3.98	4.22	4.46	4.55
	48	5.65	6.80	8.10	9.56	11.18	12.96	13.72	3.57	3.78	4.02	4.28	4.54	4.78	4.86
ZXB055E	27	7.34	8.70	10.14	11.76	13.65	15.91	16.94	2.92	3.13	3.38	3.63	3.89	4.14	4.24
	32	7.12	8.46	9.86	11.42	13.23	15.41	16.40	3.12	3.35	3.61	3.89	4.19	4.49	4.61
	38	6.87	8.16	9.49	10.97	12.69	14.75	15.69	3.43	3.66	3.93	4.23	4.56	4.90	5.05
	43	6.69	7.94	9.21	10.61	12.24	14.19	15.09	3.76	3.98	4.25	4.56	4.90	5.28	5.43
	48	6.59	7.78	8.98	10.30	11.83	13.67	14.51	4.20	4.39	4.65	4.96	5.32	5.71	5.87

**Notes:** The rating condition is based on the return gas temperature of 18.3°C.  
 Power includes condenser fan.  
 Ambient 38°C and 43°C are typical design conditions for unit selection.

# ZXB Family: Medium Temperature

Capacity and Power (kW) at 60 Hz - TF5/TF7

# R134a

Model	Ambient Temperature (°C)	Capacity Evaporating Temperature (°C)					Power Evaporating Temperature (°C)				
		-15	-10	-5	0	5	-15	-10	-5	0	5
ZXB015E	27	2.84	3.49	4.20	4.97	5.82	1.30	1.31	1.34	1.31	1.37
	32	2.78	3.41	4.11	4.86	5.69	1.41	1.42	1.46	1.42	1.50
	38	2.68	3.29	3.96	4.69	5.50	1.58	1.60	1.64	1.60	1.69
	43	2.56	3.16	3.81	4.52	5.30	1.76	1.78	1.83	1.78	1.89
	48	2.42	2.99	3.61	4.30	5.06	1.97	1.99	2.05	1.99	2.12
	50	2.35	2.91	3.53	4.20	4.94	2.07	2.09	2.15	2.09	2.23
ZXB020E	27	3.31	4.11	4.99	5.95	6.97	1.29	1.32	1.37	1.32	1.43
	32	3.17	3.96	4.84	5.79	6.80	1.45	1.48	1.54	1.48	1.60
	38	2.98	3.77	4.63	5.56	6.55	1.66	1.70	1.76	1.70	1.83
	43	2.84	3.61	4.46	5.37	6.34	1.85	1.89	1.95	1.89	2.03
	48	2.74	3.49	4.32	5.21	6.15	2.04	2.08	2.15	2.08	2.24
	50	2.72	3.46	4.28	5.16	6.09	2.12	2.16	2.23	2.16	2.32
ZXB025E	27	3.60	4.46	5.37	6.37	7.46	1.54	1.61	1.71	1.61	1.83
	32	3.49	4.33	5.23	6.19	7.26	1.70	1.78	1.89	1.78	2.00
	38	3.37	4.18	5.04	5.97	7.00	1.91	2.01	2.13	2.01	2.25
	43	3.28	4.06	4.88	5.78	6.76	2.11	2.23	2.36	2.23	2.49
	48	3.19	3.94	4.72	5.57	6.51	2.34	2.48	2.63	2.48	2.77
	50	3.16	3.89	4.66	5.49	6.41	2.43	2.59	2.74	2.59	2.90
ZXB030E	27	4.51	5.47	6.57	7.83	9.24	1.86	1.96	2.08	1.96	2.21
	32	4.33	5.29	6.38	7.60	8.96	2.03	2.14	2.28	2.14	2.44
	38	4.14	5.09	6.15	7.33	8.62	2.25	2.36	2.52	2.36	2.72
	43	3.97	4.91	5.95	7.09	8.33	2.48	2.58	2.75	2.58	2.97
	48	3.79	4.72	5.73	6.83	8.00	2.76	2.85	3.02	2.85	3.26
	50	3.71	4.64	5.64	6.71	7.86	2.89	2.98	3.15	2.98	3.40
ZXB035E	27	6.14	7.32	8.66	10.15	11.75	2.43	2.60	2.79	2.60	3.88
	32	5.97	7.12	8.44	9.88	11.42	2.64	2.84	3.05	2.84	3.46
	38	5.76	6.88	8.14	9.52	10.99	2.92	3.16	3.40	3.16	2.99
	43	5.58	6.66	7.87	9.19	10.59	3.22	3.48	3.75	3.48	2.62
	48	5.39	6.41	7.57	8.82	10.14	3.59	3.88	4.17	3.88	2.26
	50	5.30	6.31	7.44	8.66	9.94	3.76	4.07	4.37	4.07	2.12
ZXB040E	27	6.61	8.02	9.57	11.26	13.12	2.68	2.81	3.00	2.81	4.03
	32	6.39	7.76	9.26	10.91	12.71	2.87	3.03	3.24	3.03	3.63
	38	6.16	7.46	8.89	10.48	12.22	3.16	3.34	3.56	3.34	3.19
	43	5.96	7.20	8.57	10.10	11.78	3.51	3.69	3.92	3.69	2.81
	48	5.74	6.91	8.22	9.68	11.29	3.99	4.18	4.41	4.18	2.42
	50	5.64	6.78	8.07	9.50	11.08	4.23	4.43	4.66	4.43	2.26
ZXB050E	27	7.51	9.08	10.98	13.20	15.76	3.04	3.20	3.42	3.20	3.68
	32	7.49	9.07	10.94	13.09	15.55	3.41	3.61	3.85	3.61	4.12
	38	7.44	8.98	10.77	12.82	15.12	3.87	4.11	4.38	4.11	4.66
	43	7.25	8.73	10.43	12.34	14.48	4.24	4.50	4.80	4.50	5.09
	48	6.82	8.20	9.77	11.53	13.48	4.56	4.85	5.16	4.85	5.47
	50	6.55	7.89	9.40	11.08	12.95	4.67	4.97	5.29	4.97	5.61
ZXB055E	27	8.85	10.50	12.23	14.18	16.46	3.78	4.07	4.38	4.07	4.69
	32	8.59	10.20	11.89	13.77	15.96	4.04	4.36	4.70	4.36	5.05
	38	8.28	9.84	11.45	13.23	15.30	4.41	4.74	5.10	4.74	5.50
	43	8.07	9.57	11.11	12.80	14.76	4.80	5.12	5.50	5.12	5.91
	48	7.95	9.38	10.83	12.42	14.26	5.30	5.61	5.98	5.61	6.41
	50	7.93	9.34	10.75	12.29	14.08	5.54	5.84	6.21	5.84	6.64

**Notes:** Based on the return gas temperature of 18.3°C.  
 Power includes condenser fan.  
 Ambient 38°C and 43°C are typical design conditions for unit selection.

# ZXD Family: Digital Medium Temperature

## Capacity and Power (kW) at 50 Hz - TFD/TF5

# R22

Model	Ambient Temperature (°C)	Capacity Evaporating Temperature (°C)						Power Evaporating Temperature (°C)					
		-10	-5	0	5	10	12	-10	-5	0	5	10	12
ZXD0400	27	7.73	9.28	10.88	12.42	14.67	15.18	2.66	2.77	2.92	3.02	3.30	3.38
	32	7.29	8.91	10.61	12.33	14.29	14.98	2.84	3.00	3.12	3.26	3.60	3.70
	38	6.39	7.95	9.68	11.44	13.22	14.14	3.20	3.32	3.42	3.57	4.01	4.10
	43	5.71	7.27	8.97	10.70	12.69	13.29	3.44	3.60	3.72	3.86	4.29	4.40
	48		6.55	8.06	9.76	11.56	12.17		4.40	4.62	4.70	4.96	5.07
ZXD0500	27	8.76	10.44	12.22	14.12	17.28	18.22	3.03	3.18	3.29	3.47	3.95	4.10
	32	8.31	9.96	11.72	13.68	16.62	17.47	3.35	3.57	3.67	3.97	4.50	4.58
	38	7.69	9.28	11.06	13.06	15.31	16.34	3.87	4.07	4.27	4.47	4.98	5.10
	43	6.80	8.36	10.15	12.21	14.60	15.47	4.27	4.47	4.66	4.96	5.46	5.56
	48		7.62	9.49	11.47	13.49	14.40		5.44	5.61	5.80	6.01	6.04
ZXD0600	27	10.41	12.49	14.72	17.66	19.64	20.60	3.70	3.88	4.16	4.50	4.70	4.81
	32	9.93	11.71	13.94	16.30	18.87	20.10	4.07	4.25	4.43	4.75	5.29	5.47
	38	8.90	10.57	12.85	15.26	17.77	18.92	4.53	4.71	4.90	5.23	5.86	5.98
	43	7.60	9.40	11.78	14.26	16.33	17.86	5.17	5.45	5.64	6.10	6.57	6.66
	48		9.25	11.15	13.08	15.09	16.06		6.46	6.69	6.96	7.22	7.30
ZXD0750	27	12.37	14.91	17.73	20.87			4.54	4.76	4.98	5.22		
	32	11.24	13.90	16.96	20.21			4.95	5.19	5.51	5.91		
	38	10.85	13.25	16.08	19.42			5.53	5.83	6.25	6.80		
	43		12.29	15.09	18.49				6.43	6.93	7.62		
ZXD0760	27	12.62	15.21	18.08	21.29	24.47	25.93	4.45	4.66	4.88	5.12	5.47	5.64
	32	11.46	14.18	16.96	20.61	23.07	24.56	4.85	5.09	5.40	5.79	5.86	5.97
	38	11.07	13.52	15.80	19.81	21.94	23.66	5.42	5.72	6.12	6.67	6.64	6.81
	43	10.20	12.54	14.60	18.86	21.45	22.63	5.98	6.30	6.79	7.47	7.34	7.48
	48		11.46	14.09	17.47	19.73	20.75		7.40	7.89	8.43	8.74	8.78

**Notes:** The rating condition is based on suction superheat of 10K.  
 Power includes condenser fan.  
 Ambient 38°C and 43°C are typical design conditions for unit selection.

# ZXD Family: Digital Medium Temperature

## Capacity and Power (kW) at 50 Hz - TFD/TF5

# R404A

Model	Ambient Temperature (°C)	Capacity Evaporating Temperature (°C)						Power Evaporating Temperature (°C)					
		-20	-15	-10	-5	0	5	-20	-15	-10	-5	0	5
ZXD040E	27	5.92	7.11	8.35	9.64	11.01	12.46	2.70	2.85	3.02	3.21	3.43	3.68
	32	5.53	6.69	7.87	9.11	10.40	11.75	2.99	3.12	3.27	3.44	3.64	3.87
	38	4.90	6.00	7.12	8.27	9.45	10.68	3.49	3.59	3.72	3.87	4.04	4.24
	43	4.23	5.28	6.33	7.40	8.48	9.59	4.02	4.10	4.21	4.34	4.50	4.68
	48	3.56	4.56	5.54	6.53	7.51		4.55	4.61	4.70	4.81	4.96	
ZXD050E	27	7.49	9.05	10.67	12.31	13.93	15.51	3.65	3.73	3.86	4.02	4.25	4.53
	32	6.56	8.12	9.76	11.43	13.10	14.74	4.11	4.20	4.32	4.50	4.72	5.00
	38	5.56	7.07	8.67	10.32	11.98	13.63	4.59	4.68	4.79	4.96	5.16	5.42
	43	4.88	6.28	7.79	9.37	10.98	12.58	5.11	5.17	5.27	5.40	5.59	5.81
	48	4.20	5.49	6.91	8.42	9.98		5.63	5.67	5.75	5.85	6.01	
ZXD060E	27	8.24	9.72	11.47	13.30	15.69	18.48	3.69	3.84	4.06	4.33	4.62	4.93
	32	7.58	9.06	10.72	12.58	14.72	17.20	4.40	4.54	4.75	5.01	5.28	5.56
	38	6.74	8.25	9.83	11.55	13.48	15.69	4.93	5.05	5.25	5.47	5.72	5.98
	43	5.90	7.48	9.07	10.74	12.57	14.63	5.59	5.69	5.85	6.06	6.28	6.51
	48	5.06	6.71	8.31	9.93	11.66		6.26	6.32	6.46	6.64	6.83	
ZXD075E	27	9.04	10.86	12.75	15.07	17.76	20.13	4.08	4.26	4.50	4.80	5.13	5.46
	32	8.33	10.01	11.82	13.86	16.20	18.92	4.88	5.03	5.27	5.54	5.86	6.17
	38	7.30	8.74	10.62	12.47	14.54	16.92	5.46	5.61	5.82	6.06	6.35	6.63
	43	6.26	7.93	9.61	11.38	13.32	15.50	6.20	6.32	6.49	6.71	6.96	7.22
ZXD076E	27	9.22	11.07	13.00	15.37	18.12	20.53	4.00	4.17	4.41	4.70	5.03	5.35
	32	8.50	10.21	12.06	14.14	16.53	19.30	4.78	4.93	5.16	5.43	5.74	6.05
	38	7.45	8.91	10.83	12.72	14.83	17.26	5.35	5.50	5.70	5.94	6.22	6.50
	43	6.39	8.09	9.80	11.61	13.59	15.81	6.07	6.19	6.36	6.57	6.82	7.07
	48	5.32	7.26	8.77	10.50	12.34		6.79	6.88	7.02	7.21	7.43	

**Notes:** The rating condition is based on return gas temperature of 18.3°C.  
 The rating condition is based on suction superheat of 10 K.  
 Power includes condenser fan.  
 Ambient 38°C and 43°C are typical design conditions for unit selection.

# ZXD Family: Digital Medium Temperature

## Capacity and Power (kW) at 60 Hz - TF7

# R404A

Model	Ambient Temperature (°C)	Capacity Evaporating Temperature (°C)						Power Evaporating Temperature (°C)					
		-20	-15	-10	-5	0	5	-20	-15	-10	-5	0	5
ZXD040E	27	7.10	8.53	9.35	10.80	12.99	14.70	3.24	3.42	3.62	3.85	4.05	4.34
	32	6.64	8.03	8.70	10.20	12.27	13.87	3.59	3.74	4.00	4.13	4.30	4.57
	38	5.88	7.20	7.97	9.26	11.15	12.60	4.19	4.31	4.46	4.64	4.77	5.00
	43	5.21	6.34	7.09	8.29	10.01	11.32	4.82	4.92	5.05	5.21	5.31	5.52
	48	4.27	5.60	6.20	7.31	8.86		5.46	5.53	5.64	5.77	5.85	
ZXD050E	27	8.99	10.86	11.74	13.54	15.32	17.06	4.38	4.48	4.63	4.83	5.10	5.44
	32	7.87	9.75	10.77	12.57	14.41	16.21	4.93	5.04	5.11	5.40	5.66	6.00
	38	6.67	8.48	9.54	11.35	13.18	14.99	5.51	5.61	5.75	5.95	6.20	6.51
	43	5.86	7.54	8.57	10.31	12.08	13.84	6.14	6.21	6.32	6.48	6.71	6.97
	48	5.04	6.59	7.60	9.26	10.98		6.76	6.81	6.89	7.02	7.22	
ZXD060E	27	10.22	12.06	13.41	15.56	17.89	21.07	4.42	4.61	5.08	5.41	5.78	6.16
	32	9.34	11.23	12.54	14.72	16.78	19.61	5.28	5.45	5.93	6.26	6.61	6.96
	38	8.36	10.23	11.50	13.51	15.37	17.89	5.91	6.06	6.58	6.83	7.15	7.47
	43	7.44	9.27	10.61	12.57	14.33	16.68	6.71	6.83	7.32	7.57	7.85	8.34
	48	6.27	8.22	9.72	11.62	13.29		7.51	7.59	8.07	8.30	8.54	
ZXD075E	27	11.16	13.39	14.92	17.64	19.93	22.58	4.80	5.00	5.69	6.06	6.54	6.96
	32	10.29	12.35	13.84	16.23	18.18	21.23	5.74	5.92	6.66	7.00	7.46	7.87
	38	9.01	10.78	12.43	14.60	16.31	18.99	6.42	6.60	7.35	7.66	8.09	8.45
	43	7.73	9.79	11.25	13.33	14.95	17.39	7.28	7.43	8.20	8.48	8.87	9.19
	48	6.44	8.78	10.07	12.05			8.15	8.26	9.06	9.30		

**Notes:** The rating condition is based on return gas temperature of 18.3°C.  
 The rating condition is based on suction superheat of 10 K.  
 Power includes condenser fan.  
 Ambient 38°C and 43°C are typical design conditions for unit selection.

# ZXD Family: Digital Medium Temperature

## Capacity and Power (kW) at 50 Hz - TFD/TF5

# R407F

Model	Ambient Temperature (°C)	Capacity Evaporating Temperature (°C)						Power Evaporating Temperature (°C)					
		-10	-5	0	5	10	12	-10	-5	0	5	10	12
ZXD040E	27	7.68	9.32	11.17	13.20	15.41	16.34	2.85	3.04	3.23	3.40	3.49	3.50
	32	7.30	8.93	10.73	12.69	14.77	15.64	3.13	3.30	3.50	3.70	3.86	3.90
	38	6.66	8.27	10.01	11.85	13.77	14.56	3.53	3.66	3.86	4.09	4.31	4.39
	43	6.06	7.64	9.30	11.03	12.81	13.53	3.95	4.04	4.22	4.46	4.72	4.83
	48		6.98	8.56					4.52	4.67			
ZXD050E	27	9.52	11.65	13.94	16.37	19.26	20.42	3.61	3.77	3.94	4.08	4.20	4.21
	32	9.05	11.21	13.52	15.73	18.47	19.56	3.97	4.11	4.30	4.45	4.64	4.70
	38	8.11	10.33	12.69	14.81	17.35	18.37	4.40	4.54	4.77	4.95	5.23	5.33
	43	7.45	9.47	11.72	13.90	16.40	17.40	4.98	4.98	5.19	5.45	5.82	5.97
	48		8.73	10.79					5.61	5.74			
ZXD060E	27	10.37	12.69	15.70	18.80	22.69	24.24	3.80	4.18	4.49	4.58	4.62	4.86
	32	9.85	12.20	15.23	17.91	21.39	22.78	4.33	4.74	5.15	5.11	5.14	5.40
	38	9.07	11.50	14.19	16.64	19.76	21.01	4.81	5.27	5.65	5.64	5.75	6.03
	43	8.41	10.59	12.99	15.41	18.34	19.52	5.40	5.72	5.99	6.06	6.26	6.54
	48		9.93	12.07					6.67	6.85			
ZXD075E	27	12.99	15.24	17.78	20.67			4.92	5.09	5.19	5.28		
	32	12.35	14.49	16.87	19.56			5.61	5.71	5.83	5.86		
	38	11.35	13.34	15.51	17.92			6.22	6.19	6.30	6.37		
	43		12.30	14.28	16.44				6.73	6.72	6.78		
	48												
ZXD076E	27	13.25	15.54	18.13	21.09	24.47	25.82	4.82	4.98	5.09	5.18	5.14	5.33
	32	12.59	14.78	17.21	19.96	23.07	24.32	5.50	5.59	5.71	5.74	5.71	5.94
	38	11.57	13.60	15.82	18.28	21.06	22.17	6.10	6.07	6.17	6.24	6.31	6.56
	43	10.67	12.55	14.57	16.77	19.23	20.22	6.80	6.60	6.58	6.65	6.75	6.98
	48		11.54	13.33					7.45	7.26			

**Notes:** The rating condition is based on suction superheat of 10K.  
 Power includes condenser fan.  
 Ambient 38°C and 43°C are typical design conditions for unit selection.

# ZXD Family: Digital Medium Temperature

## Capacity and Power (kW) at 60 Hz - TF7

# R407F

Model	Ambient Temperature (°C)	Capacity						Power					
		Evaporating Temperature (°C)						Evaporating Temperature (°C)					
		-10	-5	0	5	10	12	-10	-5	0	5	10	12
ZXD040E	27	8.60	10.44	13.18	15.58	18.18	19.27	3.41	3.64	3.82	4.01	4.11	4.12
	32	8.06	10.00	12.66	14.98	17.45	18.48	3.82	3.96	4.14	4.37	4.56	4.61
	38	7.46	9.27	11.81	13.98	16.25	17.18	4.23	4.39	4.56	4.82	5.08	5.17
	43	6.78	8.56	10.98	13.02	15.12	15.97	4.74	4.85	4.98	5.26	5.57	5.69
	48		7.81	10.10					5.42	5.51			
ZXD050E	27	10.48	12.81	15.33	18.01	21.19	22.46	4.33	4.53	4.72	4.90	5.04	5.06
	32	9.98	12.32	14.87	17.30	20.30	21.50	4.69	4.93	5.16	5.33	5.58	5.64
	38	8.93	11.36	13.96	16.29	19.08	20.20	5.28	5.44	5.74	5.95	6.28	6.40
	43	8.20	10.42	12.89	15.29	18.04	19.14	5.97	5.97	6.23	6.53	6.98	7.16
	48		9.60	11.87					6.73	6.90			
ZXD060E	27	12.12	14.84	17.90	21.44	25.87	27.64	4.75	5.22	5.62	5.72	5.77	6.06
	32	11.53	14.28	17.36	20.42	24.39	25.98	5.40	5.93	6.45	6.40	6.43	6.76
	38	10.62	13.45	16.18	18.97	22.53	23.95	6.02	6.58	7.06	7.04	7.17	7.53
	43	9.84	12.40	14.81	17.57	20.92	22.26	6.75	7.14	7.49	7.77	8.22	8.69
	48		11.62	13.76					8.34	8.57			
ZXD075E	27	15.21	17.84	19.95	23.19	26.90	28.53	6.22	6.42	6.62	6.73	6.68	6.97
	32	14.46	16.96	18.93	21.95	25.38	26.88	7.09	7.21	7.42	7.47	7.45	7.79
	38	13.28	15.62	17.40	20.12	23.18	24.52	7.86	7.83	8.02	8.12	8.21	8.57
	43	12.25	14.41	16.02	18.44	21.15	22.32	8.78	8.51	8.56	8.64	8.77	9.09
	48		13.26	14.68					9.60	9.46			

**Notes:** The rating condition is based on suction superheat of 10K.  
 Power includes condenser fan.  
 Ambient 38°C and 43°C are typical design conditions for unit selection.

# ZXL Family: Low Temperature

## Capacity and Power (kW) at 50 Hz - TFD/TF5

# R22

Model	Ambient Temperature (°C)	Capacity Evaporating Temperature (°C)									Power Evaporating Temperature (°C)								
		-40	-35	-30	-25	-20	-15	-10	-5	0	-40	-35	-30	-25	-20	-15	-10	-5	0
ZXL0200	20	1.35	1.57	1.90	2.28	2.76	3.30	3.93	4.64	5.41	0.94	1.03	1.12	1.19	1.26	1.31	1.36	1.40	1.43
	27	1.32	1.55	1.87	2.26	2.73	3.27	3.89	4.59	5.36	1.10	1.20	1.29	1.36	1.43	1.49	1.55	1.59	1.63
	32	1.32	1.55	1.86	2.24	2.70	3.24	3.85	4.54	5.31	1.26	1.36	1.45	1.53	1.61	1.67	1.73	1.78	1.81
	38	1.26	1.48	1.78	2.15	2.61	3.13	3.74	4.42	5.18	1.51	1.61	1.71	1.79	1.87	1.94	2.00	2.05	2.09
	43	1.15	1.36	1.66	2.03	2.47	2.99	3.59	4.27	5.02	1.76	1.87	1.97	2.05	2.13	2.21	2.27	2.32	2.37
	48	0.99	1.20	1.49	1.85	2.29	2.81				2.05	2.16	2.26	2.35	2.44	2.51			
ZXL0250	20	1.65	1.90	2.20	2.70	3.40	4.10	4.85	5.73	6.72	1.18	1.28	1.38	1.48	1.57	1.65	1.74	1.81	1.89
	27	1.61	1.87	2.12	2.67	3.31	4.03	4.84	5.72	6.69	1.32	1.40	1.49	1.57	1.64	1.71	1.78	1.84	1.90
	32	1.56	1.82	2.09	2.63	3.26	3.97	4.76	5.63	6.58	1.51	1.59	1.66	1.72	1.79	1.85	1.90	1.95	2.00
	38	1.42	1.68	1.97	2.49	3.10	3.79	4.56	5.42	6.36	1.85	1.91	1.97	2.02	2.07	2.11	2.15	2.19	2.22
	43	1.23	1.48	1.79	2.30	2.89	3.57	4.33	5.17	6.09	2.22	2.27	2.31	2.35	2.39	2.43	2.45	2.48	2.50
	48	1.10	1.28	1.54	2.03	2.61	3.27				2.66	2.70	2.74	2.77	2.79	2.82			
ZXL0300	20	1.94	2.29	2.67	3.17	3.78	4.48	5.40	6.52	8.06	1.28	1.45	1.60	1.74	1.87	1.99	2.09	2.18	2.26
	27	1.90	2.19	2.58	3.08	3.69	4.40	5.20	6.44	7.85	1.36	1.52	1.67	1.80	1.92	2.03	2.13	2.21	2.28
	32	1.80	2.09	2.49	2.99	3.60	4.32	5.14	6.06	7.63	1.55	1.70	1.85	1.98	2.09	2.20	2.29	2.37	2.43
	38	1.58	1.87	2.27	2.77	3.39	4.10	4.92	5.85	7.30	1.92	2.07	2.21	2.33	2.45	2.54	2.63	2.70	2.76
	43	1.31	1.59	1.99	2.50	3.11	3.83	4.65	5.58	6.95	2.36	2.51	2.64	2.76	2.86	2.96	3.04	3.11	3.16
	48	1.21	1.35	1.63	2.13	2.75	3.47				2.91	3.05	3.18	3.29	3.39	3.48			
ZXL0350	20	2.56	2.90	3.44	4.15	5.01	5.98	7.03	8.14	9.26	1.68	1.73	1.79	1.88	1.98	2.09	2.22	2.37	2.52
	27	2.29	2.64	3.19	3.91	4.76	5.71	6.75	7.83	8.92	1.81	1.87	1.95	2.05	2.17	2.30	2.44	2.60	2.76
	32	2.12	2.47	3.02	3.72	4.56	5.49	6.50	7.55	8.62	2.08	2.16	2.25	2.36	2.48	2.62	2.78	2.94	3.11
	38	1.93	2.27	2.80	3.48	4.28	5.19	6.16	7.16	8.18	2.52	2.60	2.71	2.82	2.96	3.11	3.27	3.44	3.63
	43	1.78	2.09	2.59	3.25	4.02	4.89	5.81	6.77	7.73	2.88	2.97	3.09	3.21	3.35	3.51	3.68	3.86	4.05
	48	1.61	1.90	2.37	2.98	3.71	4.53				3.18	3.28	3.40	3.53	3.68	3.84			
ZXL0400	20	3.18	3.85	4.64	5.56	6.60	7.77	9.06	10.48	12.03	1.94	2.08	2.22	2.38	2.54	2.70	2.88	3.06	3.25
	27	2.80	3.42	4.16	5.03	6.02	7.14	8.39	9.76	11.26	2.27	2.43	2.59	2.76	2.94	3.12	3.32	3.52	3.73
	32	2.58	3.17	3.87	4.71	5.67	6.76	7.97	9.31	10.77	2.58	2.75	2.93	3.11	3.30	3.50	3.71	3.92	4.15
	38	2.39	2.93	3.59	4.39	5.31	6.35	7.52	8.82	10.25	3.04	3.23	3.42	3.62	3.83	4.04	4.27	4.50	4.73
	43	2.27	2.78	3.41	4.17	5.06	6.07	7.21	8.47	9.86	3.50	3.69	3.90	4.11	4.33	4.56	4.80	5.04	5.30
	48	2.21	2.68	3.28	4.01	4.86	5.83				4.01	4.22	4.44	4.67	4.91	5.15			
ZXL0500	20	3.50	4.30	5.30	6.40	7.73	9.08	10.62	12.33	14.21	2.05	2.24	2.42	2.59	2.77	2.96	3.16	3.37	3.60
	27	3.12	3.84	4.73	5.79	7.01	8.39	9.92	11.60	13.42	2.56	2.72	2.87	3.03	3.20	3.38	3.57	3.79	4.02
	32	2.79	3.56	4.48	5.56	6.77	8.12	9.60	11.21	12.94	2.89	3.04	3.19	3.35	3.53	3.71	3.92	4.15	4.41
	38	2.65	3.43	4.35	5.38	6.53	7.79	9.15	10.61	12.17	3.30	3.46	3.62	3.79	3.99	4.20	4.43	4.70	4.99
	43	2.56	3.31	4.16	5.00	6.16	7.30	8.52	9.81	11.18	3.68	3.85	4.04	4.24	4.46	4.70	4.98	5.28	5.62
	48	2.30	2.97	3.73	4.56	5.57	6.60				4.12	4.32	4.54	4.78	5.04	5.33			
ZXL0600	20	3.70	4.70	5.84	7.14	8.63	10.32	12.23	14.38	16.78	2.56	2.72	2.89	3.09	3.32	3.57	3.85	4.16	4.50
	27	3.51	4.44	5.51	6.72	8.09	9.66	11.42	13.41	15.64	3.21	3.37	3.55	3.75	3.97	4.22	4.49	4.78	5.11
	32	3.44	4.35	5.37	6.53	7.85	9.34	11.02	12.91	15.03	3.58	3.76	3.96	4.17	4.40	4.66	4.94	5.24	5.56
	38	3.28	4.17	5.17	6.29	7.55	8.98	10.58	12.37	14.38	4.05	4.27	4.51	4.76	5.02	5.30	5.60	5.93	6.28
	43	2.96	3.86	4.85	5.96	7.19	8.57	10.12	11.85	13.78	4.58	4.85	5.13	5.42	5.72	6.04	6.38	6.73	7.11
	48	2.71	3.50	4.29	5.39	6.60	7.96				5.32	5.65	5.98	6.33	6.68	7.05			
ZXL0750	20	4.20	5.60	6.90	8.00	9.50	11.43	13.31	15.49	17.97	3.02	3.17	3.34	3.53	3.74	3.99	4.27	4.60	4.96
	27	4.00	5.16	6.18	7.43	8.91	10.80	12.58	14.78	17.24	3.51	3.68	3.87	4.08	4.33	4.61	4.93	5.29	5.70
	32	3.76	4.71	5.84	7.17	8.68	10.40	12.31	14.44	16.78	3.88	4.06	4.28	4.52	4.79	5.10	5.45	5.84	6.28
	38	3.52	4.55	5.71	7.02	8.48	10.09	11.86	13.80	15.90	4.40	4.61	4.85	5.12	5.43	5.77	6.16	6.59	7.08
	43	3.41	4.42	5.53	6.75	8.07	9.52	11.08	12.76	14.58	4.93	5.17	5.43	5.73	6.07	6.45	6.87	7.34	7.86
	48	3.12	4.04	5.01	6.06	7.50	8.70				5.58	5.85	6.14	6.47	6.84	7.25			

**Note:** The rating condition is based on the return gas temperature of 5°C.  
 Power includes condenser fan.  
 Ambient 38°C and 43°C are typical design conditions for unit selection.

# ZXL Family: Low Temperature

## Capacity and Power (kW) at 60 Hz - TF5/TF7

# R22

Model	Ambient Temperature (°C)	Capacity Evaporating Temperature (°C)									Power Evaporating Temperature (°C)								
		-40	-35	-30	-25	-20	-15	-10	-5	0	-40	-35	-30	-25	-20	-15	-10	-5	0
ZXL020E	20	1.51	1.95	2.44	3.02	3.69	4.48	5.41	6.50	7.76	1.40	1.46	1.51	1.56	1.61	1.66	1.71	1.77	1.84
	27	1.34	1.81	2.32	2.89	3.53	4.27	5.13	6.12	7.26	1.59	1.65	1.71	1.76	1.82	1.88	1.94	2.01	2.10
	32	1.28	1.78	2.30	2.86	3.49	4.19	5.00	5.92	6.99	1.74	1.80	1.86	1.92	1.98	2.05	2.12	2.20	2.30
	38	1.21	1.74	2.28	2.84	3.44	4.11	4.85	5.70	6.67	1.95	2.01	2.07	2.14	2.21	2.29	2.37	2.47	2.58
	43	1.11	1.67	2.22	2.78	3.36	4.00	4.69	5.48	6.37	2.17	2.23	2.30	2.37	2.45	2.54	2.62	2.74	2.88
	48	0.92	1.51	2.07	2.63	3.20	3.81	4.46	5.18	5.99	2.45	2.52	2.59	2.67	2.76	2.85	2.94	3.07	3.23
ZXL025E	20	2.40	2.52	2.93	3.56	4.37	5.33	6.41	7.56	8.77	1.85	1.89	1.91	1.98	1.99	2.02	2.07	2.14	2.23
	27	2.38	2.50	2.88	3.47	4.24	5.16	6.19	7.29	8.44	2.02	2.03	2.05	2.09	2.14	2.20	2.29	2.40	2.53
	32	2.36	2.48	2.82	3.38	4.11	4.99	5.97	7.03	8.13	2.23	2.25	2.29	2.33	2.40	2.48	2.58	2.70	2.84
	38	2.34	2.46	2.75	3.26	3.93	4.75	5.67	6.67	7.70	2.62	2.65	2.68	2.73	2.80	2.88	2.98	3.10	3.25
	43	2.31	2.44	2.71	3.16	3.78	4.54	5.41	6.33	7.30	3.01	3.02	3.05	3.09	3.14	3.21	3.29	3.43	3.59
	48	2.30	2.43	2.69	3.08	3.64	4.34	5.13	5.99	6.88	3.38	3.39	3.39	3.41	3.44	3.49	3.59	3.71	3.88
ZXL030E	20	2.73	2.87	3.34	4.06	4.98	6.08	7.31	8.62	9.99	1.92	1.97	1.99	2.06	2.07	2.10	2.15	2.22	2.32
	27	2.72	2.86	3.28	3.96	4.84	5.88	7.05	8.31	9.62	2.10	2.11	2.13	2.17	2.22	2.29	2.38	2.49	2.63
	32	2.69	2.83	3.22	3.85	4.69	5.69	6.81	8.02	9.27	2.32	2.34	2.38	2.43	2.49	2.58	2.68	2.80	2.95
	38	2.68	2.81	3.14	3.71	4.48	5.42	6.47	7.60	8.78	2.73	2.75	2.79	2.84	2.91	2.99	3.10	3.23	3.38
	43	2.66	2.80	3.09	3.60	4.31	5.18	6.16	7.22	8.32	3.13	3.14	3.17	3.21	3.27	3.34	3.43	3.56	3.74
	48	2.65	2.79	3.07	3.52	4.15	4.95	5.85	6.83	7.84	3.52	3.52	3.53	3.54	3.58	3.63	3.73	3.86	4.03
ZXL035E	20	3.34	3.48	4.04	4.91	6.03	7.36	8.84	10.43	12.09	2.25	2.30	2.32	2.41	2.42	2.46	2.52	2.60	2.72
	27	3.32	3.46	3.97	4.79	5.85	7.12	8.54	10.06	11.64	2.46	2.47	2.50	2.54	2.60	2.68	2.78	2.92	3.07
	32	3.30	3.45	3.90	4.66	5.67	6.88	8.24	9.70	11.22	2.71	2.74	2.78	2.84	2.92	3.01	3.14	3.28	3.46
	38	3.29	3.45	3.80	4.49	5.43	6.55	7.83	9.20	10.62	3.19	3.22	3.26	3.33	3.40	3.50	3.63	3.78	3.95
	43	3.27	3.42	3.74	4.36	5.22	6.27	7.46	8.74	10.07	3.66	3.68	3.71	3.76	3.82	3.91	4.02	4.18	4.38
	48	3.26	3.40	3.72	4.25	5.03	5.98	7.09	8.27	9.50	4.11	4.12	4.13	4.15	4.19	4.25	4.37	4.53	4.73
ZXL040E	20	4.57	4.88	5.55	6.54	7.83	9.39	11.19	13.21	15.43	2.78	2.87	2.96	3.06	3.14	3.19	3.24	3.29	3.34
	27	3.90	4.41	5.21	6.29	7.62	9.16	10.90	12.81	14.86	2.98	3.08	3.22	3.36	3.49	3.58	3.66	3.74	3.86
	32	3.61	4.21	5.07	6.17	7.48	8.97	10.62	12.41	14.29	3.25	3.38	3.55	3.72	3.88	3.98	4.08	4.19	4.29
	38	3.36	4.02	4.90	5.98	7.22	8.60	10.10	11.68	13.33	3.71	3.88	4.07	4.27	4.45	4.57	4.68	4.80	4.92
	43	3.16	3.83	4.69	5.70	6.85	8.10	9.43	10.81	12.21	4.17	4.36	4.58	4.80	4.98	5.11	5.23	5.36	5.49
	48	2.88	3.53	4.33	5.25	6.27	7.35	8.47	9.61	10.73	4.68	4.89	5.13	5.35	5.54	5.67	5.80	5.93	6.06
ZXL050E	20	4.80	5.82	6.84	7.99	9.47	11.27	13.38	15.79	18.50	2.81	2.97	3.19	3.41	3.60	3.73	3.79	3.84	3.90
	27	4.28	4.98	5.94	7.18	8.66	10.40	12.37	14.57	16.99	3.25	3.43	3.65	3.86	4.05	4.20	4.27	4.34	4.40
	32	3.90	4.71	5.73	6.97	8.42	10.06	11.88	13.88	16.04	3.57	3.76	3.98	4.21	4.42	4.58	4.67	4.77	4.86
	38	3.73	4.62	5.67	6.86	8.20	9.66	11.25	12.95	14.76	4.01	4.22	4.47	4.73	4.97	5.17	5.31	5.45	5.59
	43	3.64	4.55	5.56	6.67	7.87	9.15	10.49	11.95	13.51	4.47	4.71	5.00	5.29	5.58	5.83	5.95	6.08	6.20
	48	3.38	4.27	5.22	6.20	7.22	8.27	9.43	10.60	11.84	5.07	5.36	5.69	6.04	6.38	6.69	6.85	7.01	7.16
ZXL060E	20	5.71	6.97	8.14	9.51	11.27	13.41	15.92	18.79	22.02	3.58	3.83	4.12	4.40	4.64	4.82	4.89	4.96	5.03
	27	5.09	5.92	7.07	8.54	10.31	12.37	14.72	17.34	20.22	4.19	4.43	4.71	4.98	5.23	5.41	5.50	5.59	5.68
	32	4.64	5.60	6.82	8.30	10.02	11.97	14.13	16.51	19.09	4.60	4.85	5.14	5.43	5.70	5.91	6.03	6.15	6.27
	38	4.44	5.50	6.75	8.17	9.76	11.50	13.39	15.41	17.56	5.17	5.44	5.76	6.10	6.41	6.67	6.85	6.91	6.98
	43	4.33	5.41	6.62	7.94	9.37	10.89	12.48	14.22	16.07	5.76	6.08	6.45	6.83	7.20	7.52	7.68	7.85	8.03
	48	4.03	5.09	6.21	7.38	8.60	9.84	11.21	12.61	14.08	6.54	6.91	7.34	7.79	8.23	8.62	8.83	9.09	9.35
ZXL075E	20	6.05	7.30	8.62	10.08	11.94	14.21	16.88	19.92	23.34	3.93	4.22	4.53	4.84	5.11	5.30	5.38	5.46	5.53
	27	5.40	6.28	7.50	9.05	10.93	13.12	15.60	18.38	21.44	4.61	4.87	5.18	5.48	5.75	5.96	6.05	6.15	6.25
	32	4.91	5.93	7.23	8.80	10.62	12.68	14.98	17.50	20.23	5.06	5.34	5.65	5.97	6.27	6.50	6.63	6.76	6.90
	38	4.71	5.83	7.15	8.66	10.34	12.19	14.19	16.34	18.61	5.68	5.99	6.34	6.71	7.05	7.34	7.54	7.73	7.93
	43	4.59	5.74	7.02	8.42	9.93	11.54	13.23	15.08	17.04	6.34	6.69	7.09	7.51	7.92	8.27	8.45	8.63	8.80
	48	4.27	5.39	6.58	7.82	9.11	10.43	11.89	13.38	14.93	7.19	7.60	8.07	8.57	9.05	9.49	9.71	9.94	10.17

**Note:** The rating condition is based on the return gas temperature of 5°C.  
 Power includes condenser fan.  
 Ambient 38°C and 43°C are typical design conditions for unit selection.

# ZXL Family: Low Temperature Capacity and Power (kW) at 50 Hz - TFD/TF5

# R404A

Model	Ambient Temperature (°C)	Capacity Evaporating Temperature (°C)									Power Evaporating Temperature (°C)								
		-40	-35	-30	-25	-20	-15	-10	-5	0	-40	-35	-30	-25	-20	-15	-10	-5	0
ZXL020E	20	1.83	2.17	2.55	2.97	3.42	3.92	4.46	5.04	5.66	1.22	1.36	1.50	1.65	1.70	1.95	2.12	2.28	2.38
	27	1.66	2.02	2.42	2.86	3.34	3.86	4.42	5.02	5.66	1.35	1.47	1.60	1.73	1.86	2.00	2.14	2.29	2.44
	32	1.45	1.82	2.24	2.70	3.19	3.73	4.31	4.92	5.58	1.50	1.60	1.71	1.83	1.95	2.08	2.21	2.34	2.48
	38	1.25	1.49	1.93	2.40	2.92	3.47	4.07	4.70	5.38	1.72	1.81	1.91	2.01	2.12	2.23	2.34	2.46	2.59
	43	1.10	1.23	1.58	2.07	2.60	3.18	3.79	4.44	5.13	1.95	2.03	2.11	2.20	2.30	2.39	2.50	2.60	2.72
	48	0.99	1.12	1.16	1.67	2.21	2.80				2.22	2.29	2.36	2.44	2.52	2.60			
ZXL025E	20	2.00	2.36	2.86	3.44	4.10	4.83	5.64	6.53	7.49	1.34	1.46	1.55	1.66	1.76	2.10	2.33	2.44	2.54
	27	1.89	2.31	2.80	3.37	4.02	4.74	5.54	6.42	7.37	1.59	1.68	1.77	1.87	1.97	2.23	2.36	2.50	2.64
	32	1.80	2.26	2.74	3.30	3.94	4.65	5.44	6.31	7.25	1.84	1.90	1.99	2.08	2.18	2.35	2.48	2.61	2.74
	38	1.63	2.03	2.50	3.05	3.68	4.38	5.15	6.01	6.94	2.12	2.16	2.22	2.31	2.41	2.61	2.72	2.84	2.96
	43	1.31	1.70	2.16	2.70	3.31	4.01	4.77	5.62	6.54	2.44	2.45	2.50	2.57	2.67	2.90	3.01	3.11	3.22
	48	1.20	1.24	1.69	2.22	2.82	3.51				2.89	2.90	2.91	2.98	3.08	3.28			
ZXL030E	20	2.23	2.87	3.62	4.45	5.35	6.30	7.29	8.30	9.31	1.55	1.73	1.90	2.07	2.10	2.39	2.53	2.60	2.70
	27	2.09	2.58	3.17	3.85	4.60	5.41	6.25	7.61	8.67	1.67	1.84	2.00	2.15	2.30	2.45	2.58	2.71	2.83
	32	2.08	2.49	3.00	3.60	4.27	5.00	5.77	7.35	8.38	1.89	2.05	2.20	2.35	2.49	2.62	2.75	2.87	2.99
	38	2.00	2.33	2.77	3.31	3.92	4.59	5.31	6.95	7.95	2.31	2.45	2.60	2.73	2.86	2.99	3.10	3.21	3.32
	43	1.73	2.03	2.44	2.95	3.54	4.19	4.89	6.55	7.52	2.77	2.91	3.05	3.18	3.30	3.41	3.52	3.62	3.72
	48	1.50	1.70	2.00	2.38	2.96	3.61				3.36	3.49	3.61	3.73	3.84	3.95			
ZXL035E	20	2.70	3.47	4.25	5.07	5.95	6.92	8.00	9.22	10.62	1.91	1.95	2.03	2.30	2.50	2.70	2.80	3.00	3.20
	27	2.55	3.31	4.07	4.85	5.69	6.61	7.63	8.78	10.09	2.26	2.33	2.43	2.56	2.72	2.90	3.08	3.27	3.47
	32	2.47	3.20	3.94	4.68	5.48	6.35	7.31	8.40	9.63	2.59	2.67	2.79	2.93	3.11	3.31	3.52	3.74	3.96
	38	2.37	3.08	3.75	4.45	5.17	5.97	6.85	7.84	8.98	3.00	3.09	3.22	3.38	3.58	3.79	4.03	4.28	4.53
	43	2.28	2.94	3.57	4.20	4.86	5.59	6.38	7.29	8.33	3.31	3.40	3.58	3.70	3.91	4.14	4.39	4.66	4.94
	48	2.17	2.76	3.33	3.89	4.48	5.12				4.00	4.15	4.30	4.45	4.50	4.60			
ZXL040E	20	3.78	4.51	5.38	6.38	7.49	8.71	10.01	11.39	12.84	2.45	2.70	2.75	3.01	3.05	3.12	3.90	4.07	4.20
	27	3.24	3.99	4.86	5.85	6.93	8.10	9.35	10.66	12.01	2.69	2.88	3.10	3.34	3.40	3.50	4.10	4.31	4.50
	32	3.02	3.77	4.63	5.58	6.63	7.75	8.93	10.16	11.43	2.99	3.17	3.39	3.64	3.90	4.17	4.43	4.67	4.88
	38	2.85	3.56	4.37	5.27	6.25	7.28	8.36	9.48	10.63	3.54	3.70	3.91	4.15	4.41	4.68	4.94	5.19	5.41
	43	2.67	3.34	4.10	4.93	5.83	6.77	7.75	8.76	9.78	4.08	4.22	4.40	4.62	4.87	5.12	5.38	5.63	5.85
	48	2.38	2.99	3.68	4.43	5.23	6.06				4.63	4.73	4.88	5.07	5.29	5.52			
ZXL050E	20	4.42	5.18	6.21	7.47	8.91	10.50	12.20	13.98	15.78	2.70	3.00	3.20	3.40	3.65	3.80	4.20	4.50	4.70
	27	3.80	4.58	5.58	6.78	8.12	9.57	11.09	12.64	14.19	2.92	3.16	3.39	3.62	3.86	4.09	4.40	4.58	4.83
	32	3.52	4.31	5.29	6.43	7.69	9.04	10.42	11.81	13.17	3.26	3.49	3.72	3.96	4.20	4.46	4.72	5.00	5.29
	38	3.25	4.03	4.98	6.06	7.22	8.43	9.65	10.84	11.97	3.88	4.10	4.33	4.57	4.83	5.11	5.41	5.73	6.07
	43	2.99	3.77	4.69	5.71	6.78	7.87	8.95	9.97	10.89	4.43	4.64	4.87	5.12	5.40	5.70	6.03	6.39	6.77
	48	2.63	3.40	4.28	5.23	6.21	7.19				4.89	5.10	5.33	5.59	5.88	6.21			
ZXL060E	20	4.84	5.80	6.92	8.19	9.59	11.11	12.72	14.41	16.16	3.00	3.20	3.50	3.76	3.90	4.15	4.41	4.67	5.20
	27	4.49	5.51	6.68	7.99	9.42	10.95	12.57	14.27	16.01	3.62	3.84	4.08	4.36	4.66	4.97	5.30	5.63	5.97
	32	4.30	5.32	6.48	7.77	9.17	10.67	12.26	13.91	15.60	4.04	4.27	4.53	4.83	5.16	5.51	5.88	6.27	6.66
	38	4.07	5.02	6.12	7.34	8.66	10.08	11.57	13.11	14.70	4.60	4.84	5.12	5.44	5.80	6.19	6.61	7.05	7.51
	43	3.81	4.67	5.67	6.79	8.00	9.30	10.67	12.09	13.54	5.17	5.41	5.69	6.03	6.42	6.84	7.30	7.78	8.29
	48	3.42	4.16	5.03	6.00	7.07	8.22				5.88	6.11	6.41	6.76	7.16	7.61			
ZXL075E	20	5.50	6.64	7.94	9.41	11.06	12.91	14.96	17.24	19.75	3.47	3.73	4.01	4.31	4.64	4.98	5.34	5.70	6.09
	27	4.99	6.14	7.42	8.84	10.40	12.13	14.03	16.12	18.41	3.93	4.20	4.51	4.84	5.21	5.59	6.01	6.44	6.89
	32	4.75	5.90	7.14	8.50	9.99	11.61	13.39	15.33	17.45	4.35	4.63	4.94	5.30	5.68	6.10	6.55	7.03	7.53
	38	4.49	5.61	6.80	8.08	9.46	10.94	12.55	14.30	16.19	4.98	5.25	5.58	5.95	6.36	6.81	7.30	7.83	8.38
	43	4.21	5.30	6.43	7.63	8.90	10.25	11.71	13.28	14.97	5.61	5.89	6.22	6.60	7.03	7.51	8.03	8.59	9.19
	48	3.81	4.85	5.91	7.01	8.16	9.38				6.38	6.65	6.98	7.38	7.82	8.32			

**Notes:** The rating condition is based on the return gas temperature of 5°C.  
Power includes condenser fan.  
Ambient 38°C and 43°C are typical design conditions for unit selection.

# ZXL Family: Low Temperature

## Capacity and Power (kW) at 60 Hz- TF5/ TF7

# R404A

Model	Ambient Temperature (°C)	Capacity Evaporating Temperature (°C)									Power Evaporating Temperature (°C)								
		-40	-35	-30	-25	-20	-15	-10	-5	0	-40	-35	-30	-25	-20	-15	-10	-5	0
ZXL020E	20	1.85	2.31	2.89	3.56	4.31	5.12	5.99	6.90	7.83	1.59	1.65	1.71	1.78	1.86	1.94	2.02	2.11	2.19
	27	1.59	2.09	2.69	3.37	4.10	4.88	5.69	6.52	7.35	1.83	1.90	1.97	2.05	2.14	2.23	2.33	2.43	2.52
	32	1.51	2.04	2.65	3.32	4.03	4.77	5.53	6.30	7.05	2.03	2.10	2.18	2.27	2.36	2.46	2.57	2.67	2.78
	38	1.46	2.01	2.61	3.26	3.93	4.62	5.31	5.98	6.62	2.29	2.37	2.46	2.56	2.66	2.77	2.89	3.00	3.12
	43	1.37	1.92	2.52	3.14	3.78	4.41	5.03	5.61	6.16	2.54	2.63	2.73	2.83	2.95	3.07	3.16	3.30	3.45
	48	1.18	1.73	2.30	2.89	3.48	4.05	4.59	5.09	5.52	2.84	2.93	3.04	3.15	3.27	3.40	3.50	3.65	3.80
ZXL025E	20	2.06	2.60	3.28	4.11	5.09	6.24	7.40	8.55	9.71	1.65	1.78	1.91	2.03	2.13	2.19	2.26	2.32	2.39
	27	1.94	2.48	3.13	3.90	4.81	5.86	6.91	7.96	9.01	2.00	2.13	2.26	2.38	2.50	2.58	2.67	2.75	2.84
	32	1.93	2.46	3.08	3.80	4.64	5.61	6.58	7.55	8.52	2.27	2.39	2.53	2.66	2.79	2.89	3.00	3.11	3.21
	38	1.92	2.42	3.00	3.65	4.41	5.27	6.13	6.99	7.85	2.63	2.75	2.90	3.05	3.20	3.34	3.47	3.60	3.74
	43	1.86	2.33	2.85	3.45	4.12	4.88	5.65	6.41	7.17	2.98	3.11	3.27	3.45	3.62	3.78	3.94	4.11	4.27
	48	1.68	2.11	2.58	3.11	3.69	4.35	5.01	5.66	6.32	3.40	3.55	3.73	3.92	4.12	4.32	4.51	4.71	4.90
ZXL030E	20	2.79	3.39	4.15	5.04	6.02	7.06	8.09	9.12	10.15	1.98	2.09	2.22	2.35	2.47	2.54	2.61	2.68	2.74
	27	2.66	3.24	3.95	4.78	5.67	6.59	7.51	8.43	9.35	2.29	2.39	2.52	2.68	2.83	2.96	3.09	3.22	3.35
	32	2.56	3.13	3.81	4.59	5.42	6.26	7.10	7.94	8.78	2.52	2.60	2.74	2.90	3.08	3.25	3.41	3.58	3.74
	38	2.41	2.95	3.60	4.32	5.07	5.81	6.56	7.30	8.05	2.88	2.94	3.06	3.24	3.44	3.64	3.84	4.05	4.25
	43	2.20	2.73	3.35	4.02	4.71	5.37	6.04	6.70	7.36	3.31	3.34	3.45	3.63	3.84	4.07	4.30	4.53	4.76
	48	1.89	2.41	3.00	3.62	4.25	4.83	5.42	6.00	6.59	3.91	3.91	4.00	4.17	4.39	4.65	4.90	5.15	5.40
ZXL035E	20	3.14	3.93	4.91	6.04	7.32	8.71	10.19	11.74	13.32	2.37	2.45	2.55	2.65	2.77	2.89	3.01	3.14	3.27
	27	2.69	3.56	4.58	5.72	6.97	8.30	9.68	11.09	12.50	2.73	2.83	2.94	3.06	3.19	3.33	3.47	3.62	3.76
	32	2.57	3.47	4.51	5.64	6.85	8.12	9.41	10.71	11.98	3.02	3.12	3.25	3.38	3.52	3.67	3.83	3.98	4.14
	38	2.48	3.41	4.44	5.54	6.69	7.86	9.03	10.17	11.26	3.41	3.53	3.66	3.81	3.97	4.13	4.30	4.47	4.65
	43	2.33	3.27	4.28	5.34	6.42	7.50	8.55	9.55	10.47	3.79	3.92	4.06	4.22	4.39	4.57	4.72	4.92	5.14
	48	2.00	2.94	3.92	4.92	5.92	6.89	7.81	8.65	9.39	4.23	4.37	4.53	4.70	4.88	5.07	5.22	5.44	5.67
ZXL040E	20	3.75	4.74	5.97	7.48	9.27	11.37	13.46	15.56	17.66	2.56	2.76	2.96	3.14	3.30	3.40	3.50	3.60	3.70
	27	3.54	4.52	5.70	7.10	8.75	10.66	12.57	14.49	16.40	3.11	3.30	3.50	3.69	3.87	4.00	4.13	4.27	4.40
	32	3.52	4.48	5.60	6.92	8.45	10.21	11.98	13.74	15.50	3.52	3.70	3.91	4.13	4.32	4.49	4.65	4.81	4.98
	38	3.50	4.41	5.45	6.65	8.02	9.59	11.16	12.72	14.29	4.07	4.27	4.49	4.73	4.96	5.17	5.38	5.59	5.80
	43	3.38	4.23	5.19	6.27	7.50	8.89	10.27	11.66	13.05	4.62	4.83	5.07	5.34	5.61	5.86	6.11	6.37	6.62
	48	3.05	3.84	4.70	5.66	6.72	7.92	9.11	10.31	11.50	5.27	5.50	5.78	6.08	6.39	6.69	6.99	7.29	7.60
ZXL050E	20	5.36	5.97	6.95	8.27	9.92	11.86	14.08	16.54	19.21	3.56	3.85	4.06	4.20	4.32	4.42	4.53	4.68	4.87
	27	5.11	5.87	6.92	8.25	9.82	11.62	13.60	15.76	18.06	3.74	4.02	4.26	4.46	4.66	4.87	5.12	5.44	5.84
	32	4.78	5.61	6.70	8.00	9.49	11.15	12.95	14.86	16.86	3.91	4.19	4.45	4.71	5.00	5.32	5.72	6.20	6.80
	38	4.32	5.23	6.31	7.55	8.92	10.39	11.93	13.52	15.14	4.80	5.03	5.27	5.53	5.85	6.24	6.72	7.32	8.07
	43	3.99	4.93	5.99	7.16	8.39	9.68	10.99	12.29	13.56	5.62	5.79	5.98	6.22	6.54	6.96	7.42	8.15	9.06
	48	3.79	4.74	5.75	6.82	7.90	8.98	10.03	11.02	11.92	6.35	6.42	6.55	6.75	7.05	7.47	7.96	8.74	9.73
ZXL060E	20	5.85	7.17	8.69	10.36	12.14	14.01	15.92	17.83	19.70	4.44	4.51	4.79	5.18	5.62	6.02	6.29	6.37	6.44
	27	5.68	6.94	8.36	9.90	11.54	13.22	14.92	16.60	18.22	4.88	4.97	5.28	5.72	6.22	6.70	7.07	7.26	7.45
	32	5.51	6.71	8.06	9.51	11.03	12.59	14.14	15.64	17.07	5.37	5.45	5.77	6.23	6.76	7.27	7.70	7.95	8.20
	38	5.25	6.38	7.63	8.97	10.35	11.74	13.10	14.40	15.59	6.17	6.23	6.53	6.99	7.54	8.08	8.55	8.85	8.92
	43	4.98	6.04	7.21	8.45	9.71	10.95	12.15	13.27	14.26	7.04	7.06	7.33	7.78	8.32	8.87	9.24	9.64	9.85
	48	4.65	5.65	6.73	7.86	8.99	10.09	11.13	12.06	12.85	8.05	8.07	8.30	8.72	9.24	9.79	10.14	10.56	10.80
ZXL075E	20	6.81	7.58	8.82	10.50	12.60	15.07	17.88	21.00	24.40	4.99	5.39	5.68	5.89	6.05	6.19	6.34	6.55	6.82
	27	6.49	7.45	8.79	10.48	12.47	14.75	17.28	20.02	22.94	5.23	5.63	5.96	6.24	6.52	6.82	7.17	7.61	8.17
	32	6.07	7.13	8.50	10.15	12.05	14.16	16.44	18.87	21.42	5.48	5.87	6.24	6.60	6.99	7.45	8.00	8.68	9.51
	38	5.49	6.64	8.02	9.59	11.33	13.19	15.15	17.18	19.23	6.72	7.04	7.37	7.74	8.18	8.73	9.41	10.25	11.30
	43	5.07	6.26	7.61	9.09	10.66	12.29	13.94	15.60	17.21	7.87	8.10	8.37	8.71	9.16	9.74	10.40	11.41	12.68
	48	4.81	6.01	7.31	8.66	10.04	11.40	12.73	13.98	15.13	8.89	8.99	9.16	9.44	9.86	10.45	11.15	12.24	13.63

**Notes:** The rating condition is based on the return gas temperature of 5°C.  
 Power includes condenser fan.  
 Ambient 38°C and 43°C are typical design conditions for unit selection.

# ZXL Family: Low Temperature

## Capacity and Power (kW) at 50 Hz - PFJ/TFD/TF5

# R407F

Model	Ambient Temperature (°C)	Capacity Evaporating Temperature (°C)									Power Evaporating Temperature (°C)								
		-40	-35	-30	-25	-20	-15	-10	-5	0	-40	-35	-30	-25	-20	-15	-10	-5	0
ZXL020E	20	1.35	1.74	2.24	2.85	3.55	4.33	5.17	6.06	6.99	1.32	1.39	1.45	1.49	1.53	1.57	1.62	1.70	1.80
	27	1.32	1.68	2.15	2.72	3.37	4.10	4.88	5.72	6.58	1.69	1.76	1.82	1.86	1.90	1.94	1.98	2.05	2.14
	32	1.25	1.59	2.04	2.59	3.22	3.91	4.67	5.47	6.29	1.74	1.83	1.90	1.96	2.01	2.06	2.11	2.19	2.28
	38	1.14	1.47	1.91	2.43	3.04	3.71	4.43	5.19	5.98	1.80	1.93	2.03	2.12	2.20	2.27	2.35	2.45	2.57
	43	1.06	1.38	1.81	2.33	2.92	3.57	4.27	5.01	5.78	2.02	2.19	2.34	2.46	2.57	2.68	2.80	2.92	3.07
	48	1.00	1.33	1.76	2.27	2.85	3.49				2.55	2.77	2.96	3.14	3.30	3.45			
ZXL025E	20	1.61	2.12	2.76	3.55	4.41	5.40	6.51	7.76	9.07	1.59	1.69	1.74	1.82	1.86	1.92	2.01	2.13	2.29
	27	1.58	2.05	2.64	3.38	4.18	5.11	6.16	7.32	8.54	2.06	2.15	2.18	2.23	2.24	2.28	2.33	2.45	2.59
	32	1.49	1.94	2.51	3.22	3.99	4.88	5.89	7.00	8.17	2.07	2.18	2.27	2.33	2.34	2.42	2.48	2.57	2.69
	38	1.36	1.80	2.35	3.03	3.77	4.62	5.59	6.65	7.76	2.08	2.17	2.34	2.48	2.56	2.71	2.82	2.95	3.09
	43	1.26	1.69	2.23	2.90	3.62	4.46	5.39	6.42	7.50	2.49	2.46	2.63	2.86	3.02	3.27	3.43	3.62	3.81
	48	1.20	1.62	2.16	2.82	3.54	4.36				3.18	3.38	3.44	3.71	3.99	4.32			
ZXL030E	20	1.92	2.44	3.12	3.90	4.80	5.88	7.17	8.69	10.34	1.75	1.90	1.99	2.06	2.13	2.14	2.23	2.34	2.49
	27	1.85	2.36	2.99	3.72	4.56	5.57	6.77	8.20	9.74	2.23	2.43	2.49	2.52	2.57	2.53	2.59	2.69	2.82
	32	1.75	2.24	2.84	3.54	4.35	5.32	6.47	7.84	9.31	2.24	2.46	2.59	2.64	2.69	2.69	2.75	2.82	2.92
	38	1.60	2.07	2.65	3.33	4.11	5.04	6.14	7.45	8.85	2.26	2.45	2.67	2.81	2.94	3.01	3.13	3.23	3.36
	43	1.48	1.94	2.52	3.19	3.95	4.86	5.93	7.19	8.55	2.70	2.78	3.00	3.24	3.46	3.64	3.81	3.97	4.13
	48	1.40	1.87	2.44	3.10	3.86	4.75				3.45	3.81	3.93	4.20	4.58	4.81			
ZXL035E	20	2.61	3.36	4.19	5.04	5.99	7.07	8.33	9.84	11.63	1.93	1.99	2.11	2.27	2.51	2.73	2.99	3.31	3.63
	27	2.57	3.21	4.02	4.84	5.75	6.78	7.96	9.37	11.06	2.31	2.30	2.42	2.58	2.82	3.05	3.31	3.65	3.99
	32	2.52	3.16	3.92	4.69	5.54	6.51	7.63	8.98	10.58	2.65	2.63	2.74	2.90	3.15	3.39	3.66	4.03	4.40
	38	2.37	3.01	3.69	4.42	5.18	6.08	7.13	8.38	9.90	3.07	3.09	3.19	3.37	3.63	3.90	4.21	4.62	5.06
	43	2.28	2.87	3.51	4.17	4.89	5.73	6.70	7.88	9.33	3.54	3.56	3.68	3.87	4.17	4.48	4.82	5.30	5.82
	48	2.20	2.83	3.42	4.02	4.68	5.46				4.12	4.27	4.39	4.59	4.94	5.28			
ZXL040E	20	3.11	3.96	4.92	6.01	7.25	8.63	10.18	11.90	13.80	2.30	2.42	2.60	2.84	3.12	3.43	3.76	4.08	4.40
	27	3.06	3.87	4.80	5.83	7.00	8.30	9.76	11.38	13.17	2.74	2.85	3.03	3.26	3.54	3.85	4.18	4.52	4.84
	32	2.93	3.72	4.60	5.59	6.70	7.94	9.33	10.86	12.56	3.08	3.19	3.38	3.63	3.93	4.26	4.61	4.97	5.32
	38	2.73	3.47	4.30	5.23	6.26	7.42	8.71	10.13	11.72	3.53	3.68	3.90	4.19	4.52	4.90	5.29	5.70	6.11
	43	2.56	3.26	4.04	4.90	5.86	6.94	8.14	9.47	10.95	3.98	4.17	4.44	4.77	5.16	5.58	6.04	6.50	6.92
	48	2.42	3.07	3.78	4.58	5.47	6.46				4.52	4.77	5.10	5.49	5.94	6.44			
ZXL050E	20	3.76	4.52	5.65	7.10	8.78	10.62	12.55	14.47	16.30	2.77	3.01	3.13	3.27	3.48	3.71	3.98	4.38	4.73
	27	3.50	4.25	5.33	6.70	8.28	9.99	11.75	13.47	15.08	2.95	3.13	3.28	3.45	3.63	3.94	4.25	4.60	5.12
	32	3.23	3.97	5.04	6.36	7.87	9.51	11.15	12.74	14.20	3.39	3.56	3.72	3.87	4.05	4.36	4.61	5.03	5.56
	38	2.90	3.62	4.67	5.96	7.40	8.94	10.48	11.92	13.22	4.23	4.35	4.47	4.61	4.79	5.06	5.35	5.77	6.33
	43	2.69	3.38	4.42	5.68	7.08	8.55	10.00	11.34	12.47	4.99	4.98	5.09	5.22	5.51	5.85	6.17	6.50	6.94
	48	2.55	3.19	4.24	5.48	6.86	8.28				5.60	5.40	5.55	5.87	6.20	6.62			
ZXL060E	20	4.16	5.21	6.51	8.05	9.81	11.76	13.70	15.71	17.54	3.11	3.31	3.54	3.74	3.85	4.17	4.35	4.83	5.32
	27	4.14	5.11	6.38	7.89	9.61	11.43	13.32	15.21	17.02	3.65	3.81	3.95	4.15	4.39	4.71	5.12	5.65	6.28
	32	3.94	4.90	6.17	7.68	9.38	11.22	13.12	15.01	16.82	4.20	4.36	4.52	4.72	4.98	5.31	5.74	6.30	7.00
	38	3.60	4.52	5.74	7.22	8.88	10.69	12.56	14.42	16.23	4.97	5.13	5.29	5.49	5.75	6.09	6.54	7.10	7.83
	43	3.33	4.18	5.34	6.75	8.36	10.11	11.93	13.75	15.51	5.67	5.81	5.95	6.14	6.40	6.74	7.19	7.76	8.49
	48	3.13	3.90	4.98	6.29	7.81	9.47				6.36	6.48	6.61	6.78	7.02	7.34			
ZXL075E	20	4.67	5.79	7.23	8.95	10.90	13.06	15.39	17.85	20.40	3.56	3.74	3.93	4.14	4.42	4.78	5.26	5.89	6.69
	27	4.60	5.69	7.08	8.73	10.61	12.66	14.87	17.18	19.57	3.97	4.17	4.37	4.61	4.91	5.30	5.81	6.46	7.30
	32	4.36	5.44	6.80	8.41	10.22	12.21	14.33	16.54	18.82	4.53	4.73	4.93	5.17	5.48	5.88	6.40	7.07	7.92
	38	3.98	5.05	6.38	7.94	9.70	11.60	13.63	15.73	17.87	5.38	5.57	5.77	6.00	6.30	6.70	7.22	7.89	8.74
	43	3.68	4.75	6.06	7.59	9.30	11.14	13.09	15.10	17.14	6.15	6.32	6.50	6.72	7.01	7.40	7.90	8.57	9.41
	48	3.49	4.55	5.85	7.35	9.01	10.80				6.90	7.05	7.20	7.40	7.66	8.03			

**Notes:** The rating condition is based on a return gas temperature of 5°C.  
 Power includes condenser fan.  
 Ambient 38°C and 43°C are typical design conditions for unit selection.

# ZXL Family: Low Temperature

## Capacity and Power (kW) at 60 Hz - TF5/TF7

# R407F

Model	Ambient Temperature (°C)	Capacity Evaporating Temperature (°C)						Power Evaporating Temperature (°C)					
		-40	-35	-30	-25	-20	-15	-40	-35	-30	-25	-20	-15
ZXL020E	20	1.64	2.13	2.76	3.54	4.43	5.44	1.66	1.74	1.82	1.86	1.93	1.93
	27	1.60	2.05	2.64	3.36	4.20	5.14	2.09	2.17	2.26	2.30	2.37	2.35
	32	1.51	1.94	2.51	3.20	4.00	4.90	2.12	2.23	2.34	2.40	2.47	2.47
	38	1.38	1.79	2.33	3.00	3.77	4.63	2.18	2.32	2.47	2.56	2.68	2.70
	43	1.27	1.68	2.21	2.86	3.62	4.46	2.41	2.61	2.80	2.94	3.09	3.15
	48	1.20	1.61	2.14	2.78	3.52	4.35	3.01	3.26	3.51	3.70	3.92	4.01
	50	1.17	1.58	2.11	2.75	3.48	4.30	3.35	3.62	3.91	4.13	4.39	4.49
ZXL025E	20	1.96	2.59	3.40	4.40	5.50	6.79	1.99	2.11	2.19	2.27	2.34	2.36
	27	1.91	2.50	3.25	4.18	5.21	6.41	2.55	2.65	2.70	2.75	2.80	2.77
	32	1.81	2.37	3.08	3.98	4.97	6.11	2.52	2.65	2.79	2.85	2.89	2.90
	38	1.65	2.18	2.87	3.73	4.68	5.78	2.52	2.61	2.84	3.00	3.12	3.22
	43	1.52	2.05	2.72	3.56	4.49	5.56	2.97	2.93	3.15	3.42	3.63	3.84
	48	1.44	1.97	2.63	3.46	4.38	5.42	3.75	3.98	4.07	4.38	4.74	5.02
	50	1.40	1.93	2.60	3.42	4.32	5.36	4.21	4.67	4.62	4.93	5.40	5.72
ZXL030E	20	2.34	2.98	3.84	4.84	6.00	7.40	2.15	2.38	2.50	2.58	2.61	2.62
	27	2.24	2.88	3.67	4.60	5.68	6.99	2.76	2.91	3.03	3.12	3.11	3.08
	32	2.11	2.72	3.48	4.38	5.41	6.66	2.73	2.99	3.18	3.23	3.22	3.23
	38	1.93	2.51	3.24	4.10	5.10	6.30	2.73	2.95	3.24	3.40	3.47	3.58
	43	1.78	2.36	3.08	3.92	4.89	6.06	3.22	3.30	3.60	3.87	4.04	4.27
	48	1.68	2.26	2.98	3.81	4.77	5.91	4.06	4.48	4.65	4.96	5.28	5.58
	50	1.64	2.22	2.93	3.76	4.71	5.85	4.56	5.26	5.27	5.59	6.02	6.36
ZXL035E	20	3.16	4.11	5.16	6.25	7.48	8.89	2.36	2.49	2.65	2.85	3.16	3.36
	27	3.12	3.92	4.94	5.99	7.16	8.50	2.82	2.95	3.07	3.19	3.52	3.71
	32	3.05	3.84	4.80	5.79	6.89	8.15	3.23	3.20	3.36	3.55	3.88	4.07
	38	2.87	3.65	4.52	5.44	6.43	7.60	3.70	3.71	3.86	4.07	4.42	4.63
	43	2.74	3.48	4.29	5.14	6.06	7.15	4.22	4.24	4.41	4.62	5.02	5.25
	48	2.65	3.43	4.17	4.94	5.79	6.79	4.86	5.02	5.20	5.42	5.88	6.13
	50	2.61	3.40	4.12	4.85	5.68	6.64	5.15	5.40	5.59	5.82	6.30	6.56
ZXL040E	20	3.77	4.84	6.06	7.46	9.05	10.85	2.88	3.02	3.27	3.56	3.94	4.22
	27	3.70	4.73	5.89	7.22	8.72	10.42	3.39	3.51	3.76	4.04	4.42	4.68
	32	3.54	4.53	5.64	6.91	8.34	9.95	3.76	3.89	4.15	4.44	4.84	5.11
	38	3.29	4.22	5.27	6.45	7.78	9.27	4.26	4.42	4.72	5.06	5.50	5.81
	43	3.08	3.95	4.93	6.03	7.27	8.66	4.74	4.96	5.31	5.70	6.20	6.55
	48	2.90	3.71	4.61	5.62	6.76	8.04	5.33	5.60	6.03	6.48	7.07	7.47
	50	2.83	3.61	4.48	5.45	6.55	7.79	5.60	5.91	6.38	6.87	7.49	7.92
ZXL050E	20	4.56	5.53	6.96	8.81	10.97	13.36	3.46	3.75	3.94	4.09	4.38	4.56
	27	4.24	5.18	6.55	8.29	10.32	12.54	3.64	3.86	4.08	4.26	4.53	4.79
	32	3.90	4.84	6.18	7.85	9.79	11.91	4.14	4.34	4.56	4.73	4.99	5.24
	38	3.50	4.41	5.72	7.34	9.19	11.18	5.10	5.23	5.42	5.57	5.82	6.01
	43	3.24	4.09	5.40	6.99	8.77	10.67	5.96	5.92	6.10	6.23	6.62	6.87
	48	3.06	3.86	5.17	6.73	8.48	10.31	6.60	6.35	6.57	6.93	7.38	7.68
	50	2.99	3.77	5.07	6.62	8.35	10.15	6.88	6.52	6.75	7.23	7.70	8.03
ZXL060E	20	5.05	6.38	8.01	9.98	12.25	14.78	3.85	4.00	4.30	4.53	4.68	4.90
	27	5.01	6.23	7.84	9.77	11.97	14.35	4.52	4.69	4.91	5.14	5.47	5.72
	32	4.77	5.97	7.57	9.49	11.67	14.05	5.14	5.31	5.55	5.77	6.13	6.38
	38	4.35	5.49	7.03	8.89	11.02	13.36	6.00	6.18	6.41	6.63	6.99	7.23
	43	4.01	5.07	6.53	8.31	10.35	12.61	6.76	6.91	7.12	7.34	7.70	7.91
	48	3.77	4.73	6.07	7.72	9.65	11.78	7.50	7.61	7.83	8.00	8.34	8.52
	50	3.66	4.58	5.88	7.48	9.37	11.44	7.83	7.92	8.14	8.29	8.61	8.77
ZXL075E	20	5.67	7.08	8.90	11.09	13.61	16.43	4.45	4.67	4.93	5.19	5.57	5.88
	27	5.57	6.95	8.71	10.81	13.22	15.89	4.90	5.13	5.42	5.70	6.11	6.44
	32	5.27	6.62	8.34	10.38	12.71	15.29	5.53	5.76	6.05	6.33	6.75	7.06
	38	4.80	6.13	7.81	9.79	12.04	14.50	6.49	6.70	6.99	7.25	7.67	7.95
	43	4.44	5.76	7.40	9.34	11.51	13.90	7.34	7.52	7.79	8.03	8.43	8.68
	48	4.20	5.51	7.13	9.02	11.14	13.45	8.14	8.28	8.52	8.73	9.11	9.32
	50	4.10	5.41	7.02	8.89	10.98	13.25	8.49	8.60	8.82	9.01	9.37	9.55

**Notes:** The rating condition is based on a return gas temperature of 5°C.  
 Power includes condenser fan.  
 Ambient 38°C and 43°C are typical design conditions for unit selection.

# ZX Family: Medium Temperature

## Technical Data at 50 Hz - PFJ

Family				ZX			
Nominal Rating	Horsepower	HP	2	2.5	3	4	
Model Name			ZX0200	ZX0250	ZX0300	ZX0400	
			ZX020E	ZX025E	ZX030E	ZX040E	
Performance	R22	ET/AT/RGT	°C	-7/32/18			
		Capacity	kW	3.85	4.51	5.53	7.57
		COP	W/W	2.41	2.69	2.64	2.54
	R404A	ET/AT/RGT	°C	-7/32/18			
		Capacity	kW	4.30	4.84	6.00	7.80
		COP	W/W	2.26	2.37	2.35	2.29
	R407F	ET/AT/RGT	°C	-7/32/18			
		Capacity	kW	4.40	4.99	6.31	8.37
		COP	W/W	2.32	2.40	2.38	2.38
	Sound Pressure Level	@1m	dB(A)	60			
Compressor	Model Name	R22		ZX15KC-PFJ	ZX19KC-PFJ	ZX21KC-PFJ	ZX29KC-PFJ
		R404A		ZX15KCE-PFJ	ZX19KCE-PFJ	ZX21KCE-PFJ	ZX29KCE-PFJ
		R407F		ZX15KCE-PFJ	ZX19KCE-PFJ	ZX21KCE-PFJ	ZX29KCE-PFJ
	Rated Load Ampere	R22	Amp	13.2	14.6	16.4	20.0
		R404A	Amp	13.2	14.6	16.4	20.0
		R407F	Amp	13.2	14.6	16.4	20.0
	Locked Rotor Ampere	R22	Amp	58.0	61.0	82.0	114.0
		R404A	Amp	58.0	61.0	82.0	114.0
		R407F	Amp	58.0	61.0	82.0	114.0
	Oil Type	R22		MINERAL			
R404A			POE				
R407F			POE				
Oil Recharge Volume	R22/R404A/R407F		1.33	1.33	1.33	1.83	
Fan Motor	Number of Fan		Pieces	1	1	1	1
	Diameter		mm	450	450	450	450
	Fan Speed		rpm	933	933	933	933
	Air Flow	Total	m <sup>3</sup> /h	3483	3483	3483	3483
	Total Fan Motor Power	Input	W	116	116	116	116
Others	Oil Separator	Volume	Liters	0.5	0.5	0.5	0.5
	Receiver Volume	R22	kg	5.1	5.1	5.1	5.1
		R404A	kg	4.4	4.4	4.4	4.4
		R407F	kg	4.5	4.5	4.5	4.5
	Pipes	Suction OD	Inch	3/4	3/4	3/4	3/4
		Liquid OD	Inch	1/2	1/2	1/2	1/2
	Dimension	W x D x H	mm	1029 x 424 x 840			
Weight	Net	kg	76	79	79	100	
	Gross	kg	114	117	117	138	

# ZX Family: Medium Temperature

## Technical Data at 50 Hz - TFD/TF5

Family				ZX							
Nominal Rating	Horsepower	HP	2	3	4	5	6	7.5	7.6		
Model Name			ZX0200	ZX0300	ZX0400	ZX0500	ZX0600	ZX0750	ZX0760		
			ZX020E	ZX030E	ZX040E	ZX050E	ZX060E	ZX075E	ZX076E		
Performance	R22	ET/AT/RGT	°C	-7/32/18							
		Capacity	kW	3.85	5.53	7.57	9.30	11.20	12.60	12.85	
		COP	W/W	2.41	2.64	2.54	2.66	2.60	2.57	2.65	
	R404A	ET/AT/RGT	°C	-7/32/18							
		Capacity	kW	4.30	6.00	7.80	10.70	11.80	13.20	13.46	
		COP	W/W	2.26	2.35	2.29	2.40	2.41	2.40	2.50	
	R407F	ET/AT/RGT	°C	-7/32/18							
		Capacity	kW	4.40	6.31	8.37	10.49	11.68	12.73	12.98	
		COP	W/W	2.32	2.38	2.38	2.44	2.56	2.56	2.55	
	Sound Pressure Level	@1m	dB(A)	60							
	Compressor	Model Name	R22		ZX15KC-TFD	ZX21KC-TFD	ZX30KC-TFD	ZX38KC-TFD	ZX45KC-TFD	ZX51KC-TFD	ZX51KC-TFD
			R404A		ZX15KCE-TFD	ZX21KCE-TFD	ZX30KCE-TFD	ZX38KCE-TFD	ZX45KCE-TFD	ZX51KCE-TFD	ZX51KCE-TFD
R407F				ZX15KCE-TFD	ZX21KCE-TFD	ZX30KCE-TFD	ZX38KCE-TFD	ZX45KCE-TFD	ZX51KCE-TFD	ZX51KCE-TFD	
Rated Load Ampere		R22	Amp	4.3	5.7	7.4	8.9	11.5	12.0	12.0	
		R404A	Amp	5.0	6.1	7.5	9.6	11.5	11.8	11.8	
		R407F	Amp	5.0	6.1	7.5	9.6	11.5	11.8	11.8	
Locked Rotor Ampere		R22	Amp	26.0	36.0	44.3	58.6	67.0	101.0	101.0	
		R404A	Amp	26.0	36.0	44.3	58.6	67.0	101.0	101.0	
		R407F	Amp	26.0	36.0	44.3	58.6	67.0	101.0	101.0	
Oil Type		R22		MINERAL							
	R404A		POE								
	R407F		POE								
Oil Recharge Volume	R22/R404A/ R407F		1.18	1.33	1.83	1.83	1.66	1.66	1.66		
Fan Motor	Number of Fan	Pieces	1	1	1	2	2	2	2		
	Diameter	mm	450	450	450	450	450	450	450		
	Fan Speed	rpm	830	830	830	830	830	830	830		
	Air Flow	Total	m <sup>3</sup> /h	2922	2922	2922	5910	5910	5910	5910	
	Total Fan Motor Power	Input	W	116	116	116	246	246	246	246	
Others	Oil Separator	Volume	Liters	0.5	0.5	0.5	0.5	0.5	0.5	0.5	
	Receiver Volume	R22	kg	5.1	5.1	5.1	7.2	7.2	7.2	7.2	
		R404A	kg	4.4	4.4	4.4	6.3	6.3	6.3	6.3	
		R407F	kg	4.5	4.5	4.5	6.4	6.4	6.4	6.4	
	Pipes	Suction OD	Inch	3/4	3/4	7/8	7/8	7/8	7/8	7/8	
		Liquid OD	Inch	1/2	1/2	1/2	1/2	1/2	1/2	1/2	
	Dimension	W x D x H	mm	1029 x 424 x 840			1029 x 424 x 1242				
Weight	Net	kg	76	79	100	108	112	118	121		
	Gross	kg	114	117	121	152	156	162	154		

# ZX Family: Medium Temperature

## Technical Data at 60 Hz - TF5/TF7

Family				ZX					
Nominal Rating	Horsepower	HP	2	3	4	5	6	7.5	
Model Name			ZX0200 ZX020E	ZX0300 ZX030E	ZX0400 ZX040E	ZX0500 ZX050E	ZX0600 ZX060E	ZX0750 ZX075E	
Performance	R22	ET/AT/RGT	°C	-7/32/18					
		Capacity	kW	4.79	6.49	9.52	10.76	12.77	14.18
		COP	W/W	2.42	2.37	2.56	2.51	2.45	2.37
	R404A	ET/AT/RGT	°C	-7/32/18					
		Capacity	kW	5.10	7.30	10.16	12.46	14.48	15.28
		COP	W/W	2.37	2.27	2.48	2.43	2.42	2.22
	R407F	ET/AT/RGT	°C	-7/32/18					
		Capacity	kW	5.44	7.79	10.34	12.95	14.42	15.72
		COP	W/W	2.29	2.35	2.35	2.41	2.53	2.52
	Sound Pressure Level	@1m	dB(A)	60					
Compressor	Model Name	R22		ZX15KC-TF5/7	ZX21KC-TF5/7	ZX29KC-TF5/7	ZX38KC-TF5/7	ZX45KC-TF5/7	ZX51KC-TF5/7
		R404A		ZX15KC-TF5/7	ZX21KC-TF5/7	ZX29KC-TF5/7	ZX38KC-TF5/7	ZX45KC-TF5/7	ZX51KC-TF5/7
		R407F		ZX15KC-TF5/7	ZX21KC-TF5/7	ZX29KC-TF5/7	ZX38KC-TF5/7	ZX45KC-TF5/7	ZX51KC-TF5/7
	Rated Load Ampere	R22	Amp	8.9/5.0	11.4/7.5	15.0/9.3	20.7/10.7	20.7/10.7	25.0/12.1
		R404A	Amp	8.9/5.1	12.1/7.4	15.7/9.6	24.0/12.4	23.1/12.6	26.0/14.1
		R407F	Amp	8.9/5.1	12.1/7.4	15.7/9.6	24.0/12.4	23.1/12.6	26.0/14.1
	Locked Rotor Ampere	R22	Amp	55.0/27.0	77.0/39.0	115.0/54.0	128.0/64.0	156.0/70.0	164.0/100.0
		R404A	Amp	55.0/27.0	77.0/39.0	115.0/54.0	128.0/64.0	156.0/70.0	164.0/100.0
		R407F	Amp	55.0/27.0	77.0/39.0	115.0/54.0	128.0/64.0	156.0/70.0	164.0/100.0
	Oil Type	R22		MINERAL					
R404A			POE						
R407F			POE						
Oil Recharge Volume	R22/R404A/R407F	Liters	1.18	1.33	1.83	1.83	1.66	1.66	
Fan Motor	Number of Fan	Pieces	1	1	2	2	2	2	
	Diameter	mm	450	450	450	450	450	450	
	Fan Speed	rpm	933	933	933	933	933	933	
	Air Flow	Total	m <sup>3</sup> /h	3483	3483	6966	6966	6966	6966
	Total Fan Motor Power	Input	W	145	145	290	290	290	290
Others	Oil Separator	Volume	Liters	0.5	0.5	0.5	0.5	0.5	0.5
	Receiver Volume	R22	kg	5.1	5.1	7.2	7.2	7.2	7.2
		R404A	kg	4.4	4.4	6.3	6.3	6.3	6.3
		R407F	kg	4.5	4.5	6.4	6.4	6.4	6.4
	Pipes	Suction OD	Inch	3/4	3/4	3/4	3/4	3/4	3/4
		Liquid OD	Inch	1/2	1/2	1/2	1/2	1/2	1/2
	Dimension	W x D x H	mm	1029 x 424 x 840			1029 x 424 x 1242		
Weight	Net	kg	76	79	100	108	112	121	
	Gross	kg	114	117	135	152	156	162	

# ZXB Family: Medium Temperature

## Technical Data at 50 Hz - TFD/TF5

Family				ZXB							
Nominal Rating	Horsepower	HP	1.5	2	2.5	3	3.5	4	5	5.5	
Model Name			ZXB015E	ZXB020E	ZXB025E	ZXB030E	ZXB035E	ZXB040E	ZXB050E	ZXB055E	
Power	Phase	Ph	3	3	3	3	3	3	3	3	
Performance	R134a	ET/AT/RGT	-7/32/18								
		Capacity	3.20	3.76	3.92	4.96	6.61	7.23	8.52	9.38	
		COP	2.73	3.01	2.74	2.86	2.88	2.94	2.91	2.65	
	Sound Pressure Level	@1m	60	60	60	61	61	61	61	61	
Compressor	Model Name	R134a	ZXI06KCE-TFD	ZXI08KCE-TFD	ZXI09KCE-TFD	ZXI11KCE-TFD	ZXI14KCE-TFD	ZXI15KCE-TFD	ZXI18KCE-TFD	ZXI21KCE-TFD	
	Rated Load Ampere	R134a	5.0	5.6	5.6	7.1	7.1	7.9	10.0	12.1	
	Locked Rotor Ampere	R134a	39.2	39.2	39.2	51.5	51.5	51.5	74.0	101.0	
	Oil Type	R134a	POE								
	Oil Recharge Volume	R134a	0.56	0.56	0.56	1.24	1.24	1.24	1.77	1.77	
	Oil Initial Volume	R134a	0.74	0.74	0.74	1.36	1.36	1.36	1.89	1.89	
Fan Motor	Number of Fan	Pieces	1	1	1	1	1	2	2	2	
	Diameter	mm	450	450	450	450	450	450	450	450	
	Fan Speed	rpm	830	830	830	830	830	830	830	830	
	Air Flow	Total	m <sup>3</sup> /h	2922	2922	2922	2922	2922	5910	5910	5910
	Fan Motor Power	Input	W	116	116	116	116	116	246	246	246
Others	Oil Separator	Volume	Liters	0.5	0.5	0.5	0.5	0.5	0.5	0.5	
	Receiver Volume	R134a	kg	5.1	5.1	5.1	5.1	5.1	7.2	7.2	
	Pipes	Suction OD	in	3/4	3/4	3/4	7/8	7/8	7/8	7/8	7/8
		Liquid OD	in	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
	Dimension	W x D x H	mm	1029 x 424 x 840				1029 x 424 x 1242			
Weight	Net	kg	79	81	81	93	93	106	116	121	
	Gross	kg	117	119	119	131	131	150	160	165	

# ZXB Family: Medium Temperature

## Technical Data at 60 Hz - TF5/TF7

Family			ZXB								
Nominal Rating	Horsepower	HP	1.5	2	2.5	3	3.5	4	5	5.5	
Model Name			ZXB015E	ZXB020E	ZXB025E	ZXB030E	ZXB035E	ZXB040E	ZXB050E	ZXB055E	
Power	Phase	Ph	3	3	3	3	3	3	3	3	
Performance	R134a	ET/AT/RGT	-7/32/18								
		Capacity	3.86	4.53	4.91	5.99	7.97	8.72	10.27	11.30	
		COP	2.73	3.09	2.80	2.86	2.88	2.97	2.90	2.66	
	Sound Pressure Level	@1m	60	60	60	61	61	61	61	61	
Compressor	Model Name	R134a	ZXI06KCE-TF5/7	ZXI08KCE-TF5/7	ZXI09KCE-TF5/7	ZXI11KCE-TF5/7	ZXI14KCE-TF5/7	ZXI15KCE-TF5/7	ZXI18KCE-TF5/7	ZXI21KCE-TF5/7	
	Rated Load Ampere	R134a	11.4/5.1	11.8/5.2	12.1/6.5	18.0/7.2	18.8/9.3	20.1/11.8	24.0/13.3	27.2/13.5	
	Locked Rotor Ampere	R134a	73.0/34.8	73.0/34.8	73.0/38.6	110.0/47.0	110.0/66.0	110.0/73.5	186.6/94.3	191.0/94.3	
	Oil Type	R134a	POE								
	Oil Recharge Volume	R134a	0.56	0.56	0.56	1.24	1.24	1.24	1.77	1.77	
	Oil Initial Volume	R134a	0.74	0.74	0.74	1.36	1.36	1.36	1.89	1.89	
Fan Motor	Number of Fan	Pieces	1	1	1	1	2	2	2	2	
	Diameter	mm	450	450	450	450	450	450	450	450	
	Fan Speed	rpm	933	933	933	933	933	933	933	933	
	Air Flow	Total	m <sup>3</sup> /h	3483	3483	3483	3483	6966	6966	6966	6966
	Fan Motor Power	Input	W	145	145	145	145	290	290	290	290
Others	Oil Separator	Volume	Liters	0.5	0.5	0.5	0.5	0.5	0.5	0.5	
	Receiver Volume	R134a	kg	5.1	5.1	5.1	5.1	7.2	7.2	7.2	
	Pipes	Suction OD	in	3/4	3/4	3/4	7/8	7/8	7/8	7/8	
		Liquid OD	in	1/2	1/2	1/2	1/2	1/2	1/2	1/2	
	Dimension	W x D x H	mm	1029 x 424 x 840				1029 x 424 x 1242			
	Weight	Net	kg	79	81	81	93	93	106	116	121
Gross		kg	117	119	119	131	131	150	160	165	

# ZXD Family: Digital Medium Temperature

## Technical Data at 50 Hz - TFD/TF5

Family				ZXD					
Nominal Rating	Horsepower	HP	4	5	6	7.5	7.6		
Model Name			ZXD0400	ZXD0500	ZXD0600	ZXD0750	ZXD0760		
			ZXD040E	ZXD050E	ZXD060E	ZXD075E	ZXD076E		
Performance	R22	ET/AT/RGT	°C	-7/32/18					
		Capacity	kW	7.76	9.30	11.00	12.84	13.09	
		COP	W/W	2.67	2.65	2.64	2.53	2.67	
	R404A	ET/AT/RGT	°C	-7/32/18					
		Capacity	kW	8.30	10.70	11.80	13.20	13.46	
		COP	W/W	2.47	2.43	2.41	2.43	2.49	
	R407F	ET/AT/RGT	°C	-7/32/18					
		Capacity	kW	8.28	10.34	11.26	13.63	13.90	
		COP	W/W	2.71	2.73	2.46	2.40	2.50	
	Sound Pressure Level	@1m	dB(A)	60					
	Compressor	Model Name		R22	ZBD29KQ-TFD	ZBD38KQ-TFD	ZBD45KQ-TFD	ZBD48KQ-TFD	ZBD48KQ-TFD
				R404A	ZBD29KQE-TFD	ZBD38KQE-TFD	ZBD45KQE-TFD	ZBD48KQE-TFD	ZBD48KQE-TFD
		R407F	ZBD29KQE-TFD	ZBD38KQE-TFD	ZBD45KQE-TFD	ZBD45KQE-TFD	ZBD48KQE-TFD		
Rated Load Ampere		R22	Amp	7.9	10.0	10.0	12.1	12.1	
		R404A	Amp	7.7	10.4	9.6	12.4	12.4	
		R407F	Amp	7.9	10.0	10.0	12.1	12.1	
Locked Rotor Ampere		R22	Amp	48.0	64.0	74.0	100.0	100.0	
		R404A	Amp	48.0	64.0	74.0	100.0	100.0	
		R407F	Amp	48.0	64.0	74.0	100.0	100.0	
Oil Type		R22	MINERAL						
		R404A	POE						
		R407F	POE						
Oil Recharge Volume	R22/R404A/ R407F	Liters	1.24	1.77	1.77	1.77	1.77		
Fan Motor	Number of Fan		Pieces	2	2	2	2	2	
	Diameter		mm	450	450	450	450	450	
	Fan Speed		rpm	830	830	830	830	830	
	Air Flow	Total	m <sup>3</sup> /h	5910	5910	5910	5910	5910	
	Total Fan Motor Power		Input	W	246	246	246	246	
Others	Oil Separator	Volume	Liters	0.5	0.5	0.5	0.5	0.5	
	Receiver Volume	R22	kg	7.2	7.2	7.2	7.2	7.2	
		R404A	kg	6.3	6.3	6.3	6.3	6.3	
		R407F	kg	6.4	6.4	6.4	6.4	6.4	
	Pipes	Suction OD	Inch	7/8	7/8	7/8	7/8	7/8	
		Liquid OD	Inch	1/2	1/2	1/2	1/2	1/2	
	Dimension	W x D x H	mm	1029 x 424 x 1242					
Weight	Net	kg	104	112	114	119	122		
	Gross	kg	148	156	158	163	171		

# ZXD Family: Digital Medium Temperature

## Technical Data at 60 Hz - TF7

Family				ZXD			
Nominal Rating	Horsepower	HP	4	5	6	7.5	
Model Name			ZXD040E	ZXD050E	ZXD060E	ZXD075E	
Performance	R404A	ET/AT/RGT	-10/32/18				
		Capacity	8.70	10.77	12.54	13.84	
		COP	2.18	2.11	2.12	2.08	
	R407F	ET/AT/RGT	-10/32/18				
		Capacity	8.06	9.98	11.53	14.46	
		COP	2.11	2.13	2.13	2.04	
	Sound Pressure Level	@1m	60				
Compressor	Model Name	R404A	ZBD29KQE-TF7	ZBD38KQE-TF7	ZBD45KQE-TF7	ZBD48KQE-TF7	
		R407F	ZBD29KQE-TF7	ZBD38KQE-TF7	ZBD45KQE-TF7	ZBD45KQE-TF7	
	Rated Load Ampere	R404A	Amp	9.6	11.6	12.9	14.6
		R407F	Amp	9.6	11.6	12.9	14.6
	Locked Rotor Ampere	R404A	Amp	54.0	64.0	70.0	78.0
		R407F	Amp	54.0	64.0	70.0	78.0
	Oil Type	R404A	POE				
		R407F	POE				
	Oil Recharge Volume	R404A/R407F	Liters	1.24	1.77	1.77	1.77
Fan Motor	Number of Fan		Pieces	2	2	2	2
	Diameter		mm	450	450	450	450
	Fan Speed		rpm	933	933	933	933
	Air Flow	Total	m <sup>3</sup> /h	6966	6966	6966	6966
	Total Fan Motor Power	Input	W	290	290	290	290
Others	Oil Separator	Volume	Liters	0.5	0.5	0.5	0.5
	Receiver Volume	R404A	kg	6.3	6.3	6.3	6.3
		R407F	kg	6.4	6.4	6.4	6.4
	Pipes	Suction OD	Inch	7/8	7/8	7/8	7/8
		Liquid OD	Inch	1/2	1/2	1/2	1/2
	Dimension	W x D x H	mm	1029 x 424 x 1242			
Weight	Net	kg	109	117	121	127	
	Gross	kg	148	156	158	163	

# ZXL Family: Low Temperature

## Technical Data at 50 Hz - TFD/TF5

Family				ZXL							
Nominal Rating	Horsepower	HP	2	2.5	3	3.5	4	5	6	7.5	
Model Name			ZXL0200	ZXL0250	ZXL0300	ZXL0350	ZXL0400	ZXL0500	ZXL0600	ZXL0750	
			ZXL020E	ZXL025E	ZXL030E	ZXL035E	ZXL040E	ZXL050E	ZXL060E	ZXL075E	
Performance	R22	ET/AT/RGT	-32/32/5°C								
		Capacity	kW	1.72	1.91	2.34	2.78	3.57	4.05	4.96	5.39
		COP	W/W	1.20	1.17	1.28	1.26	1.24	1.29	1.27	1.28
	R404A	ET/AT/RGT	-32/32/5°C								
		Capacity	kW	2.11	2.51	2.80	3.65	4.26	4.99	5.91	6.65
		COP	W/W	1.24	1.28	1.29	1.34	1.29	1.36	1.33	1.38
	R407F	ET/AT/RGT	-32/32/5°C								
		Capacity	kW	1.86	2.29	2.60	3.61	4.25	4.61	5.66	6.25
		COP	W/W	0.99	1.02	1.02	1.34	1.29	1.26	1.27	1.29
	Sound Pressure Level	@1m	dB(A)	60				61			
	Compressor	Model Name	R22	ZXI06KC-TFD	ZXI08KC-TFD	ZXI09KC-TFD	ZXI11KC-TFD	ZXI14KC-TFD	ZXI15KC-TFD	ZXI18KC-TFD	ZXI21KC-TFD
			R404A	ZXI06KCE-TFD	ZXI08KCE-TFD	ZXI09KCE-TFD	ZXI11KCE-TFD	ZXI14KCE-TFD	ZXI15KCE-TFD	ZXI18KCE-TFD	ZXI21KCE-TFD
R407F			ZXI06KCE-TFD	ZXI08KCE-TFD	ZXI09KCE-TFD	ZXI11KCE-TFD	ZXI14KCE-TFD	ZXI15KCE-TFD	ZXI18KCE-TFD	ZXI21KCE-TFD	
Rated Load Ampere		R22	Amp	5.4	5.5	5.7	7.4	8.1	8.8	11.1	12.1
		R404A	Amp	5.6	6.2	6.0	8.3	8.6	10.0	11.1	14.6
		R407F	Amp	5.6	6.2	6.5	8.3	8.6	10.0	11.1	14.6
Locked Rotor Ampere		R22	Amp	39.2	39.2	39.2	51.5	51.5	51.5	74.0	101.0
		R404A	Amp	39.2	39.2	39.2	51.5	51.5	51.5	74.0	101.0
		R407F	Amp	39.2	39.2	39.2	51.5	51.5	51.5	74.0	101.0
Oil Type		R22		MINERAL							
		R404A		POE							
		R407F		POE							
Oil Recharge Volume	R22/R404A/R407F	Liters	0.56	0.56	0.56	1.24	1.24	1.24	1.77	1.77	
Fan Motor	Number of Fan	Pieces	1	1	1	1	1	2	2	2	
	Diameter	mm	450	450	450	450	450	450	450	450	
	Fan Speed	rpm	830	830	830	830	830	830	830	830	
	Air Flow	Total	m <sup>3</sup> /h	2922	2922	2922	2922	2922	5910	5910	5910
	Total Fan Motor Power	Input	W	116	116	116	116	116	246	246	246
	Others	Oil Separator	Volume	Liters	0.5	0.5	0.5	0.5	0.5	0.5	0.5
Receiver Volume		R22	kg	5.1	5.1	5.1	5.1	5.1	7.2	7.2	7.2
		R404A	kg	4.4	4.4	4.4	4.4	4.4	6.3	6.3	6.3
		R407F	kg	4.5	4.5	4.5	4.5	4.5	6.4	6.4	6.4
Pipes		Suction OD	Inch	3/4	3/4	3/4	7/8	7/8	7/8	7/8	7/8
		Liquid OD	Inch	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
Dimension		W x D x H	mm	1029 x 424 x 840				1029 x 424 x 1242			
Weight		Net	kg	79	81	81	93	93	106	116	121
	Gross	kg	117	119	119	131	131	150	165	170	


# ZXL Family: Low Temperature

## Technical Data at 60 Hz - TF5/TF7


Family			ZXL									
Nominal Rating	Horsepower	HP	2	2.5	3	3.5	4	5	6	7.5		
Model Name			ZXL0200	ZXL0250	ZXL0300	ZXL0350	ZXL0400	ZXL0500	ZXL0600	ZXL0750		
			ZXL020E	ZXL025E	ZXL030E	ZXL035E	ZXL040E	ZXL050E	ZXL060E	ZXL075E		
Performance	R22	ET/AT/RGT	-32/32/5°C									
		Capacity	2.09	2.69	2.99	3.71	4.72	5.32	6.34	6.81		
		COP	1.14	1.18	1.28	1.34	1.36	1.37	1.27	1.24		
	R404A	ET/AT/RGT	-32/32/5°C									
		Capacity	2.41	2.83	3.54	4.19	5.18	6.26	7.52	7.98		
		COP	1.12	1.15	1.32	1.33	1.33	1.44	1.29	1.32		
	R407F	ET/AT/RGT	-32/32/5°C									
		Capacity	2.28	2.80	3.18	4.42	5.20	5.64	6.93	7.65		
		COP	0.99	1.02	1.02	1.34	1.29	1.26	1.27	1.29		
	Sound Pressure Level	@1m	dB(A)	60				61				
	Compressor	Model Name	R22	ZX106KCTF5/7	ZX108KCTF5/7	ZX109KCTF5/7	ZX111KCTF5/7	ZX114KCTF5/7	ZX115KCTF5/7	ZX118KCTF5/7	ZX121KCTF5/7	
			R404A	ZX106KCE-TF5/7	ZX108KCE-TF5/7	ZX109KCE-TF5/7	ZX111KCE-TF5/7	ZX114KCE-TF5/7	ZX115KCE-TF5/7	ZX118KCE-TF5/7	ZX121KCE-TF5/7	
R407F			ZX106KCE-TF5/7	ZX108KCE-TF5/7	ZX109KCE-TF5/7	ZX111KCE-TF5/7	ZX114KCE-TF5/7	ZX115KCE-TF5/7	ZX118KCE-TF5/7	ZX121KCE-TF5/7		
Rated Load Ampere		R22	Amp	12.1	12.6	12.9	19.1	20.0	21.4	25.5	28.9	
		TF5	R404A	Amp	12.1	12.6	12.9	19.1	20.0	21.4	25.5	28.9
			R407F	Amp	12.1	12.6	12.9	19.1	20.0	21.4	25.5	28.9
Rated Load Ampere		R22	Amp	5.4	5.5	6.9	7.7	9.9	12.6	14.1	14.4	
		TF7	R404A	Amp	5.6	6.2	6.9	8.6	9.9	12.6	14.1	14.4
			R407F	Amp	5.6	6.2	6.9	8.6	9.9	12.6	14.1	14.4
Locked Rotor Ampere		R22	Amp	73.0/34.8	73.0/34.8	73.0/38.6	110.0/47.0	110.0/66.0	110.0/73.5	186.6/94.3	191.0/94.3	
			R404A	Amp	73.0/34.8	73.0/34.8	73.0/38.6	110.0/47.0	110.0/66.0	110.0/73.5	186.6/94.3	191.0/94.3
			R407F	Amp	73.0/34.8	73.0/34.8	73.0/38.6	110.0/47.0	110.0/66.0	110.0/73.5	186.6/94.3	191.0/94.3
Oil Type		R22		POE								
		R404A		POE								
		R407F		POE								
Oil Recharge Volume	R22/R404A/R407F	Liters	0.56	0.56	0.56	1.24	1.24	1.24	1.77	1.77		
Fan Motor	Number of Fan	Pieces	1	1	1	1	2	2	2	2		
	Diameter	mm	450	450	450	450	450	450	450	450		
	Fan Speed	rpm	933	933	933	933	933	933	933	933		
	Air Flow	Total	m <sup>3</sup> /h	3483	3483	3483	3483	6966	6966	6966	6966	
	Total Fan Motor Power	Input	W	145	145	145	145	290	290	290	290	
Others	Oil Separator	Volume	Liters	0.5	0.5	0.5	0.5	0.5	0.5	0.5		
	Receiver Volume	R22	kg	5.1	5.1	5.1	5.1	5.1	5.1	5.1		
		R404A	kg	4.4	4.4	4.4	4.4	4.4	4.4	4.4		
		R407F	kg	4.5	4.5	4.5	4.5	6.4	6.4	6.4		
	Pipes	Suction OD	Inch	3/4	3/4	3/4	7/8	7/8	7/8	7/8	7/8	
		Liquid OD	Inch	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	
	Dimension	W x D x H	mm	1029 x 424 x 840				1029 x 424 x 1242				
Weight	Net	kg	79	81	81	93	93	106	116	121		
	Gross	kg	117	119	119	131	143	150	165	170		

# Dimensional Drawings


ZX-PFJ(2 HP-4 HP)  
 ZX-TFD(2HP-4HP) ZX-TF5/7(2HP-3HP)  
 ZXB-TFD(1.5HP-3.5HP)  
 ZXL-TFD(2HP-4HP) ZXL-TF5/7(2HP-3.5HP)

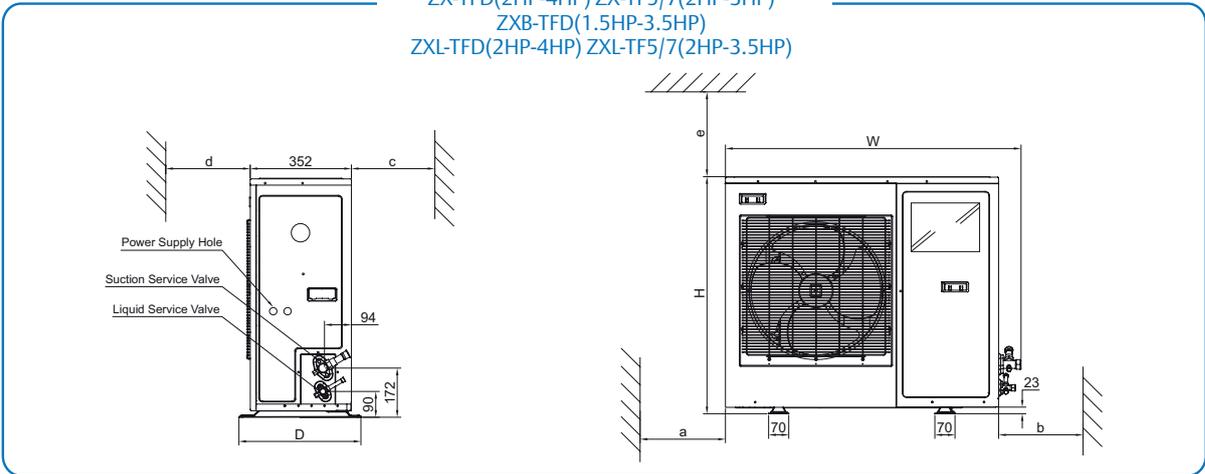

ZX-TFD(5HP-7.6HP) ZX-TF5/7(4HP-7.5HP)  
 ZXB-TFD(4HP-6HP)  
 ZXL-TFD(5HP-7.5HP) ZXL-TF5/7(4HP-7.5HP)  
 ZXD-TFD/TF7(4HP-7.6HP)

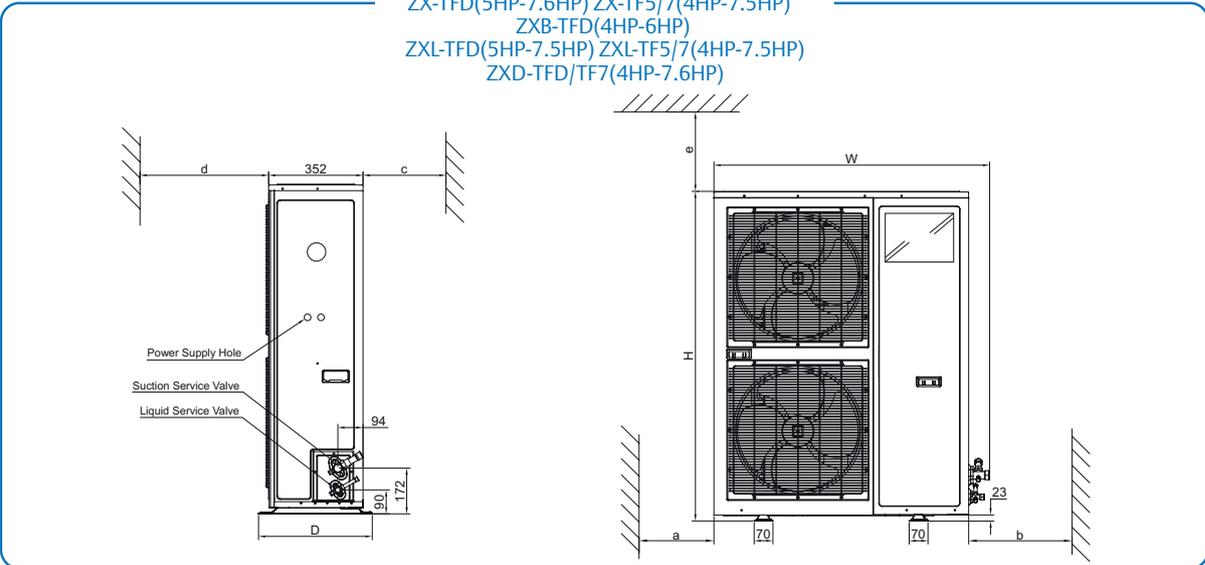

ALL MODELS

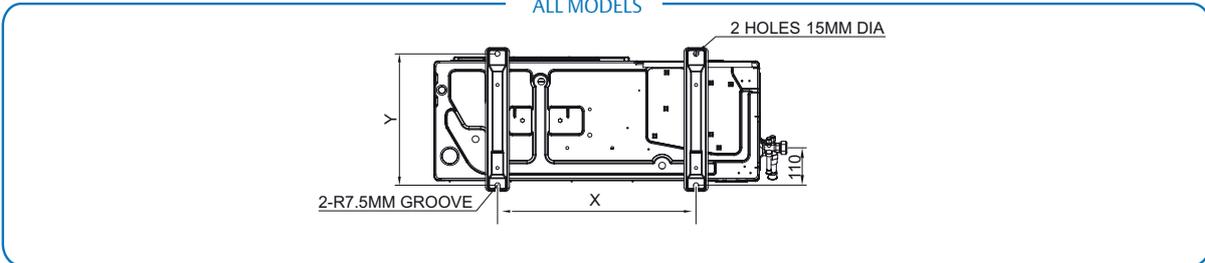

Model	Width	Height	Depth	Mtg	Centres	Conn. Size		Installation Clearances				
	W	H	D	X	Y	Suction*	Liquid*	a	b	c	d	e
	mm	mm	mm	mm	mm	mm	M.Fi.	M.Fi.	mm	mm	mm	mm
ZX-PFJ(2 HP-4 HP) ZX-TFD(2HP-4HP) ZX-TF5/7(2HP-3HP) ZXB-TFD(1.5HP-3.5HP) ZXL-TFD(2HP-4HP) ZXL-TF5/7(2HP-3.5HP)	1029	840	424	580	388	3/4"	1/2"	300	500	300	500	500
ZX-TFD(5HP-7.6HP) ZX-TF5/7(4HP-7.5HP) ZXB-TFD(4HP-6HP) ZXL-TFD(5HP-7.5HP) ZXL-TF5/7(4HP-7.5HP) ZXD-TFD/TF7(4HP-7.6HP)	1029	1242	424	580	388	7/8"	1/2"	300	500	300	500	500

# Packing Information

Container Loading, ZX Platform Condensing Unit					
Family	Model	Motor Code	Fan Type	20FT	40FT/ 40FT H
ZX / ZXB	ZXB015E	TFD	Single Fan	40	80
	ZXB020E / ZX0200/E	PFJ/TFD/TF5/TF7		40	80
	ZXB025E / ZX0250/E	PFJ/TFD		40	80
	ZXB030E / ZX0300/E	PFJ/TFD/TF5/TF7		40	80
	ZXB035E	TFD		40	80
	ZX0400/E	PFJ		40	80
	ZXB040E / ZX0400/E	TFD/TF5/TF7	Dual Fan	20	40
	ZXB050E / ZX0500/E	TFD/TF5/TF7		20	40
	ZXB055E	TFD		20	40
	ZX0600/E	TFD/TF5/TF7		20	40
ZX0750/E	TFD/TF5/TF7	20		40	
ZX0760/E	TFD/TF5/TF7	20	40		
ZXD	ZX0750/E	TFD/TF7	Dual Fan	20	40
	ZXD0500/E	TFD/TF7		20	40
	ZXD0600/E	TFD/TF7		20	40
	ZXD0750/E	TFD/TF7		20	40
	ZXD0760/E	TFD/TF7		20	40
ZXL	ZXL0200/E	TFD/TF5/TF7	Single Fan	40	80
	ZXL0250/E	TFD/TF5/TF7		40	80
	ZXL0300/E	TFD/TF5/TF7		40	80
	ZXL0350/E	TFD/TF5/TF7		40	80
	ZXL0400/E	TFD		40	80
	ZXL0400/E	TF5/TF7	Dual Fan	20	40
	ZXL0500/E	TFD/TF5/TF7		20	40
	ZXL0600/E	TFD/TF5/TF7		20	40
	ZXL0750/E	TFD/TF5/TF7		20	40

## Conversion Chart

Units Conversion Chart
KCALH x 3.9683 = BTUH
WATTS x 3.413 = BTU/H
1.80 x °C + 32 = °F
KILOGRAMS x 2.205 = POUNDS
MILLIMETERS x 0.0394 = INCHES
CUBIC CENTIMETERS x 0.06102 = CUBIC INCHES
CUBIC METERS x 35.3147 = CUBIC FEET
LITERS x 33.8181 = FLUID OUNCES
KILOWATTS x 1.341 = HORSEPOWER
BAR x 14.7 = PSI

## PRESSURE TEMPERATURE CHART AT SEA LEVEL

Red (Bar) = Vacuum

Black (Bar) = Vapor

**Bold (Bar) = Liquid**

°C	R-134a	R22	R404A HP 62	R407F Vapor	R407F Liquid	R407A Vapor	R407A Liquid	R407C Vapor	R407C Liquid	R408A	R410A	R502	R507A AZ50*	°F
-45.6	0.63	0.21	0.00	-0.26	0.03	0.30	0.03	0.37	0.09	0.07	0.34	-0.03	0.06	-50.0
-44.4	0.61	0.16	0.05	-0.22	0.08	0.26	0.03	0.33	0.04	0.02	0.41	0.02	0.12	-48.0
-43.3	0.59	0.12	0.11	-0.17	0.14	0.22	0.08	0.29	0.01	0.04	0.48	0.08	0.18	-46.0
-42.2	0.56	0.06	0.17	-0.12	0.20	0.17	0.14	0.25	0.07	0.10	0.57	0.14	0.24	-44.0
-41.1	0.53	0.01	0.23	-0.07	0.27	0.12	0.21	0.20	0.13	0.15	0.65	0.19	0.30	-42.0
-40.0	0.50	0.04	0.30	-0.02	0.34	0.07	0.27	0.16	0.19	0.21	0.74	0.26	0.37	-40.0
-38.9	0.47	0.10	0.37	0.04	0.41	0.01	0.34	0.11	0.26	0.28	0.83	0.32	0.44	-38.0
-37.8	0.44	0.15	0.43	0.10	0.48	0.04	0.41	0.06	0.32	0.34	0.92	0.39	0.52	-36.0
-36.7	0.41	0.21	0.51	0.16	0.56	0.10	0.48	0.00	0.39	0.41	1.01	0.46	0.59	-34.0
-35.6	0.37	0.28	0.59	0.22	0.64	0.16	0.56	0.06	0.46	0.48	1.12	0.53	0.68	-32.0
-34.4	0.33	0.34	0.66	0.29	0.72	0.23	0.63	0.11	0.53	0.55	1.22	0.60	0.75	-30.0
-33.3	0.29	0.41	0.74	0.36	0.80	0.29	0.72	0.17	0.61	0.63	1.33	0.68	0.84	-28.0
-32.2	0.25	0.48	0.83	0.43	0.89	0.36	0.80	0.23	0.69	0.71	1.44	0.76	0.93	-26.0
-31.1	0.21	0.55	0.92	0.51	0.98	0.43	0.89	0.30	0.77	0.79	1.56	0.84	1.02	-24.0
-30.0	0.17	0.63	1.01	0.59	1.08	0.51	0.98	0.37	0.86	0.88	1.68	0.93	1.12	-22.0
-28.9	0.13	0.70	1.10	0.67	1.18	0.59	1.08	0.45	0.94	0.97	1.81	1.01	1.21	-20.0
-27.8	0.08	0.79	1.20	0.75	1.28	0.67	1.17	0.52	1.04	1.06	1.94	1.11	1.32	-18.0
-26.7	0.03	0.87	1.30	0.84	1.39	0.75	1.28	0.60	1.14	1.15	2.07	1.20	1.42	-16.0
-25.6	0.02	0.96	1.41	0.93	1.50	0.84	1.38	0.68	1.23	1.25	2.21	1.30	1.53	-14.0
-24.4	0.08	1.05	1.52	1.03	1.61	0.93	1.49	0.77	1.34	1.35	2.35	1.40	1.64	-12.0
-23.3	0.13	1.14	1.63	1.13	1.73	1.03	1.60	0.85	1.44	1.46	2.50	1.51	1.76	-10.0
-22.2	0.19	1.23	1.74	1.23	1.85	1.12	1.72	0.94	1.55	1.57	2.66	1.61	1.88	-8.0
-21.1	0.25	1.34	1.86	1.34	1.98	1.23	1.83	1.03	1.67	1.68	2.81	1.73	2.00	-6.0
-20.0	0.32	1.44	1.99	1.45	2.11	1.33	1.96	1.13	1.79	1.79	2.98	1.84	2.13	-4.0
-18.9	0.38	1.54	2.12	1.56	2.24	1.44	2.09	1.23	1.91	1.91	3.15	1.96	2.26	-2.0
-17.8	0.45	1.66	2.25	1.68	2.38	1.55	2.22	1.34	2.03	2.03	3.32	2.08	2.40	0.0
-16.7	0.52	1.77	2.39	1.80	2.52	1.67	2.36	1.45	2.17	2.16	3.50	2.21	2.54	2.0
-15.6	0.59	1.89	2.52	1.93	2.67	1.79	2.50	1.56	2.30	2.29	3.69	2.34	2.68	4.0
-14.4	0.66	2.01	2.67	2.06	2.82	1.92	2.65	1.68	2.43	2.43	3.88	2.48	2.83	6.0
-13.3	0.74	2.14	2.82	2.20	2.98	2.05	2.80	1.80	2.58	2.57	4.08	2.61	2.99	8.0
-12.2	0.82	2.26	2.97	2.34	3.14	2.18	2.95	1.92	2.72	2.71	4.29	2.76	3.15	10.0
-11.1	0.90	2.40	3.13	2.48	3.31	2.32	3.11	2.05	2.88	2.86	4.50	2.90	3.31	12.0
-10.0	0.99	2.54	3.30	2.63	3.48	2.46	3.28	2.19	3.03	3.01	4.72	3.06	3.48	14.0
-8.9	1.08	2.68	3.46	2.79	3.66	2.61	3.45	2.32	3.19	3.17	4.94	3.21	3.66	16.0
-7.8	1.17	2.82	3.63	2.94	3.84	2.76	3.62	2.46	3.36	3.32	5.17	3.37	3.83	18.0
-6.7	1.27	2.97	3.81	3.11	4.03	2.92	3.80	2.61	3.53	3.49	5.41	3.53	4.01	20.0
-5.6	1.37	3.12	4.00	3.28	4.22	3.08	3.99	2.77	3.71	3.66	5.65	3.70	4.21	22.0
-4.4	1.47	3.28	4.19	3.45	4.42	3.25	4.18	2.92	3.89	3.84	5.90	3.88	4.40	24.0
-3.3	1.58	3.45	4.38	3.63	4.63	3.42	4.37	3.08	4.08	4.02	6.15	4.06	4.60	26.0
-2.2	1.69	3.61	4.58	3.82	4.84	3.60	4.57	3.25	4.27	4.21	6.42	4.23	4.80	28.0
-1.1	1.80	3.79	4.78	4.01	5.05	3.78	4.78	3.42	4.46	4.39	6.69	4.43	5.01	30.0
0.0	1.92	3.97	4.99	4.21	5.28	3.97	4.99	3.59	4.67	4.59	6.97	4.62	5.23	32.0
1.1	2.03	4.15	5.21	4.41	5.51	4.17	5.21	3.78	4.88	4.79	7.26	4.81	5.45	34.0
2.2	2.16	4.34	5.43	4.62	5.74	4.37	5.43	3.97	5.09	5.00	7.55	5.02	5.68	36.0
3.3	2.28	4.53	5.66	4.84	5.98	4.57	5.67	4.16	5.31	5.21	7.86	5.23	5.91	38.0
4.4	2.41	4.73	5.89	5.06	6.23	4.79	5.90	4.36	5.53	5.43	8.17	5.44	6.15	40.0
5.6	2.55	4.93	6.12	5.29	6.48	5.00	6.14	4.56	5.77	5.65	8.48	5.66	6.39	42.0
6.7	2.69	5.14	6.37	5.52	6.74	5.23	6.40	4.77	6.00	5.88	8.81	5.89	6.65	44.0
7.8	2.83	5.35	6.62	5.76	7.01	5.46	6.66	4.99	6.25	6.12	9.14	6.12	6.90	46.0
8.9	2.98	5.57	6.88	6.01	7.28	5.70	6.92	5.21	6.50	6.36	9.48	6.35	7.17	48.0

## PRESSURE TEMPERATURE CHART AT SEA LEVEL

Red(Bar)= Vacuum

Black(Bar)= Vapor

**Bold (Bar)=Liquid**

°C	R-134a	R22	R404A HP 62	R407F Vapor	R407F Liquid	R407A Vapor	R407A Liquid	R407C Vapor	R407C Liquid	R408A	R410A	R502	R507A AZ50*	°F
10.0	3.13	5.80	7.14	6.26	7.57	5.94	7.19	5.43	6.75	6.60	9.83	6.59	7.44	50.0
11.1	3.29	6.03	<b>7.41</b>	6.52	<b>7.85</b>	6.19	<b>7.46</b>	5.67	<b>7.01</b>	6.86	10.20	6.84	7.72	52.0
12.2	3.45	6.26	<b>7.70</b>	6.79	<b>8.15</b>	6.44	<b>7.74</b>	5.91	<b>7.28</b>	7.11	10.57	7.10	8.01	54.0
13.3	3.61	6.51	<b>7.98</b>	7.07	<b>8.45</b>	6.71	<b>8.03</b>	6.16	<b>7.56</b>	7.38	10.94	7.35	8.30	56.0
14.4	3.79	6.76	<b>8.27</b>	7.35	<b>8.76</b>	6.98	<b>8.33</b>	6.41	<b>7.84</b>	7.65	11.34	7.62	8.59	58.0
15.6	3.96	7.01	<b>8.57</b>	7.64	<b>9.08</b>	7.26	<b>8.63</b>	6.68	<b>8.13</b>	7.93	11.73	7.89	8.90	60.0
16.7	4.14	7.27	<b>8.88</b>	7.94	<b>9.40</b>	7.54	<b>8.94</b>	6.94	<b>8.43</b>	8.21	12.14	8.17	9.21	62.0
17.8	4.32	7.54	<b>9.19</b>	8.24	<b>9.74</b>	7.83	<b>9.26</b>	7.22	<b>8.74</b>	8.50	12.56	8.46	9.54	64.0
18.9	4.51	7.81	<b>9.50</b>	8.55	<b>10.08</b>	8.13	<b>9.59</b>	7.50	<b>9.05</b>	8.80	12.99	8.74	9.86	66.0
20.0	4.70	8.09	<b>9.83</b>	8.88	<b>10.43</b>	8.44	<b>9.92</b>	7.79	<b>9.37</b>	9.10	13.42	9.04	10.20	68.0
21.1	4.90	8.37	<b>10.17</b>	9.20	<b>10.78</b>	8.76	<b>10.26</b>	8.09	<b>9.69</b>	9.42	13.87	9.34	10.54	70.0
22.2	5.11	8.67	<b>10.51</b>	9.54	<b>11.15</b>	9.08	<b>10.61</b>	8.39	<b>10.03</b>	9.74	14.32	9.66	10.89	72.0
23.3	5.32	8.97	<b>10.86</b>	9.89	<b>11.52</b>	9.41	<b>10.97</b>	8.70	<b>10.37</b>	10.06	14.79	9.98	11.25	74.0
24.4	5.53	9.28	<b>11.22</b>	10.24	<b>11.90</b>	9.75	<b>11.34</b>	9.03	<b>10.72</b>	10.40	15.27	10.30	11.62	76.0
25.6	5.75	9.59	<b>11.59</b>	10.60	<b>12.29</b>	10.10	<b>11.71</b>	9.35	<b>11.07</b>	10.74	15.76	10.63	11.99	78.0
26.7	5.98	9.90	<b>11.96</b>	10.98	<b>12.69</b>	10.46	<b>12.09</b>	9.69	<b>11.43</b>	11.09	16.26	10.97	12.38	80.0
27.8	6.21	10.23	<b>12.34</b>	11.36	<b>13.10</b>	10.82	<b>12.48</b>	10.03	<b>11.81</b>	11.44	16.77	11.32	12.77	82.0
28.9	6.45	10.57	<b>12.73</b>	11.75	<b>13.52</b>	11.19	<b>12.88</b>	10.39	<b>12.19</b>	11.81	17.29	11.67	13.17	84.0
30.0	6.69	10.91	<b>13.13</b>	12.15	<b>13.94</b>	11.57	<b>13.28</b>	10.75	<b>12.58</b>	12.18	17.83	12.03	13.58	86.0
31.1	6.94	11.26	<b>13.54</b>	12.55	<b>14.38</b>	11.97	<b>13.70</b>	11.12	<b>12.98</b>	12.56	18.37	12.40	13.99	88.0
32.2	7.19	11.61	<b>13.96</b>	12.97	<b>14.82</b>	12.37	<b>14.12</b>	11.50	<b>13.39</b>	12.94	18.93	12.78	14.42	90.0
33.3	7.46	11.98	<b>14.39</b>	13.40	<b>15.27</b>	12.78	<b>14.56</b>	11.88	<b>13.80</b>	13.34	19.50	13.16	14.86	92.0
34.4	7.72	12.35	<b>14.82</b>	13.84	<b>15.74</b>	13.20	<b>15.01</b>	12.28	<b>14.23</b>	13.74	20.08	13.55	15.30	94.0
35.6	7.99	12.73	<b>15.26</b>	14.29	<b>16.21</b>	13.63	<b>15.46</b>	12.69	<b>14.66</b>	14.16	20.68	13.95	15.76	96.0
36.7	8.28	13.12	<b>15.72</b>	14.74	<b>16.69</b>	14.06	<b>15.92</b>	13.10	<b>15.10</b>	14.58	21.28	14.36	16.22	98.0
37.8	8.57	13.51	<b>16.18</b>	15.21	<b>17.19</b>	14.51	<b>16.39</b>	13.52	<b>15.55</b>	15.01	21.90	14.78	16.70	100.0
38.9	8.86	13.92	<b>16.66</b>	15.69	<b>17.69</b>	14.97	<b>16.87</b>	13.96	<b>16.01</b>	15.45	22.53	15.20	17.18	102.0
40.0	9.15	14.32	<b>17.14</b>	16.18	<b>18.20</b>	15.44	<b>17.36</b>	14.41	<b>16.48</b>	15.90	23.18	15.63	17.67	104.0
41.1	9.46	14.74	<b>17.63</b>	16.68	<b>18.72</b>	15.92	<b>17.86</b>	14.86	<b>16.96</b>	16.35	23.84	16.08	18.17	106.0
42.2	9.77	15.17	<b>18.13</b>	17.19	<b>19.26</b>	16.41	<b>18.37</b>	15.32	<b>17.45</b>	16.82	24.51	16.52	18.69	108.0
43.3	10.10	15.61	<b>18.65</b>	17.71	<b>19.80</b>	16.91	<b>18.89</b>	15.79	<b>17.95</b>	17.29	25.20	16.99	19.21	110.0
44.4	10.42	16.06	<b>19.17</b>	18.25	<b>20.36</b>	17.43	<b>19.42</b>	16.28	<b>18.46</b>	17.78	25.90	17.45	19.74	112.0
45.6	10.76	16.51	<b>19.70</b>	18.79	<b>20.92</b>	17.94	<b>19.97</b>	16.78	<b>18.97</b>	18.27	26.61	17.93	20.29	114.0
46.7	11.10	16.97	<b>20.25</b>	19.35	<b>21.50</b>	18.48	<b>20.52</b>	17.28	<b>19.50</b>	18.77	27.34	18.41	20.85	116.0
47.8	11.45	17.45	<b>20.81</b>	19.92	<b>22.09</b>	19.03	<b>21.08</b>	17.80	<b>20.04</b>	19.29	28.09	18.91	21.41	118.0
48.9	11.81	17.93	<b>21.37</b>	20.50	<b>22.69</b>	19.59	<b>21.66</b>	18.33	<b>20.59</b>	19.81	28.85	19.41	21.99	120.0
50.0	12.17	18.42	<b>21.95</b>	21.10	<b>23.30</b>	20.16	<b>22.23</b>	18.87	<b>21.15</b>	20.34	29.62	19.92	22.59	122.0
51.1	12.54	18.92	<b>22.54</b>	21.71	<b>23.92</b>	20.74	<b>22.83</b>	19.42	<b>21.72</b>	20.89	30.41	20.45	23.19	124.0
52.2	12.92	19.43	<b>23.14</b>	22.33	<b>24.55</b>	21.33	<b>23.44</b>	19.99	<b>22.30</b>	21.44	31.22	20.99	23.80	126.0
53.3	13.31	19.94	<b>23.75</b>	22.96	<b>25.20</b>	21.94	<b>24.06</b>	20.56	<b>22.90</b>	22.01	32.04	21.52	24.43	128.0
54.4	13.70	20.48	<b>24.38</b>	23.61	<b>25.86</b>	22.56	<b>24.68</b>	21.14	<b>23.50</b>	22.58	32.88	22.08	25.07	130.0
55.6	14.11	21.01	<b>25.02</b>	24.27	<b>26.53</b>	23.19	<b>25.32</b>	21.75	<b>24.12</b>	23.17	33.74	22.65	25.72	132.0
56.7	14.52	21.56	<b>25.67</b>	24.94	<b>27.21</b>	23.84	<b>25.98</b>	22.36	<b>24.74</b>	23.77	34.61	23.22	26.39	134.0
57.8	14.94	22.12	<b>26.34</b>	25.63	<b>27.90</b>	24.50	<b>26.64</b>	22.99	<b>25.38</b>	24.37	35.50	23.81	27.06	136.0
58.9	15.37	22.69	<b>27.01</b>	26.34	<b>28.61</b>	25.18	<b>27.32</b>	23.63	<b>26.03</b>	24.99	36.41	24.40	27.75	138.0
60.0	15.81	23.27	<b>27.70</b>	27.06	<b>29.33</b>	25.87	<b>28.01</b>	24.28	<b>26.69</b>	25.62	37.34	25.01	28.46	140.0
61.1	16.26	23.86	<b>28.41</b>	27.79	<b>30.07</b>	26.57	<b>28.71</b>	24.94	<b>27.36</b>	26.27	38.29	25.62	29.18	142.0
62.2	16.71	24.46	<b>29.13</b>	28.54	<b>30.81</b>	27.29	<b>29.43</b>	25.63	<b>28.04</b>	26.92	39.26	26.26	29.92	144.0
63.3	17.17	25.07	<b>29.87</b>	29.31	<b>31.57</b>	28.02	<b>30.15</b>	26.32	<b>28.74</b>	27.59	40.24	26.90	30.67	146.0
64.4	17.65	25.69	<b>30.61</b>	30.09	<b>32.35</b>	28.77	<b>30.90</b>	27.03	<b>29.45</b>	28.27	41.25	27.54	31.43	148.0
65.6	18.13	26.32	<b>31.39</b>	30.89	<b>33.13</b>	29.54	<b>31.65</b>	27.76	<b>30.17</b>	28.96	42.28	28.21	32.22	150.0

## General Information

Technical data are correct at the time of printing. Updates may occur, and should you need confirmation of a specific value, please contact Emerson Climate Technologies™ stating clearly the information required.

Emerson Climate Technologies cannot be held responsible for errors in capacities, dimensions, etc., stated herein. Products, specifications, and data in this literature are subject to change without notice.

The information given herein is based on data and tests which Emerson Climate Technologies believes to be reliable and which are in accordance with today's technical knowledge. It is intended for use by persons having the appropriate technical knowledge and skill, at their own discretion and risk. Our products are designed and adapted for fixed locations. For mobile applications, failures may occur.

The suitability for this has to be assured from the plant manufacturer, which may include making appropriate tests.

### Note:

The components listed in this catalogue are not released for use with caustic, poisonous or flammable substances. Emerson Climate Technologies cannot be held responsible for any damage caused by using these substances.

# Contact Lists

## Asia Pacific Headquarters

Emerson Climate Technologies  
Suite No. 2503-8, 25/F,  
Exchange Tower, 33 Wang Chiu Road,  
Kowloon Bay, Kowloon, Hong Kong  
Tel: (852) 2866 3108  
Fax: (852) 2520 6227

## Australia

Emerson Climate Technologies Australia  
Pty Ltd  
356 Chisholm Road  
Auburn NSW 2144, Australia  
Tel: (612) 9795 2800  
Fax: (612) 9738 1699

## China - Beijing

Emerson Climate Technologies (Suzhou)  
Co. Ltd  
Beijing Sales Office  
Room 1017 JianWei Building,  
66 Nan Lishi Road, XiCheng District,  
Beijing, PRC  
Tel: (8610) 5763 0488  
Fax: (8610) 5763 0499

## China - Guangzhou

Emerson Climate Technologies (Suzhou)  
Co. Ltd  
Guangzhou Sales Office  
508-509 R&F Yinglong Plaza,  
No. 76 Huangpu Road West,  
Guangzhou, PRC  
Tel: (8620) 2886 7668  
Fax: (8620) 2886 7622

## China - Shanghai

Emerson Climate Technologies  
(Suzhou) Co. Ltd  
Shanghai Sales Office  
1801 Building B, New CaoHejing  
International Business Center,  
391 Guiping Rd, Shanghai, PRC  
Tel: (8621) 3418 3968

## India - Mumbai

Emerson Climate Technologies (India) Ltd  
Delphi B-Wing, 601-602, 6th Floor  
Central Avenue, Hiranandani Business Park,  
Powai, Mumbai 400076  
Tel: (9122) 6786 0793  
Fax: (9122) 6662 0500

## India - PUNE

Emerson Climate Technologies (India) Ltd  
Plot No. 23, Rajiv Gandhi Infotech Park,  
Phase - II, Hinjewadi,  
Pune 411 057, Maharashtra, India  
Tel: (9120) 4200 2000  
Fax: (9120) 4200 2099

## Indonesia

PT Emerson Indonesia  
BSD Taman Tekno 8  
Jl. Tekno Widya Blok H10 No 2 & 3  
Tangerang Selatan 15314  
Indonesia  
Tel: (6221) 2666244  
Fax: (6221) 2666245

## Japan

Emerson Japan Ltd  
Shin-yokohama Tosho Building  
No. 3-9-5 Shin-Yokohama, Kohoku-ku  
Yokohama 222-0033 Japan  
Tel: (8145) 475 6371  
Fax: (8145) 475 3565

## Malaysia

Emerson Electric (Malaysia) Sdn. Bhd.  
Level M2, Blk A, Menara PKNS-PJ  
Jalan Yong Shook Lin  
46050 Petaling Jaya, Selangor, Malaysia  
Tel: (603) 7949 9222  
Fax: (603) 7949 9333

## Middle East & Africa

Emerson Climate Technologies  
PO Box 26382  
Jebel Ali Free Zone – South  
Dubai, UAE  
Tel: (9714) 811 8100  
Fax: (9714) 886 5465

## Philippines

Emerson Climate Technologies  
10/F SM Cyber West Avenue, EDSA cor.  
West Avenue, Barangay Bungad, Diliman,  
Quezon City 1105 Philippines  
Tel: (632) 689 7200

## South Korea

Emerson Electric Korea Ltd.  
3F POBA Gangnam Tower  
343, Hakdong-ro, Gangnam-gu,  
Seoul 135-820, Republic of Korea  
Tel: (822) 3483 1500  
Fax: (822) 592 7883

## Taiwan

Emerson Electric (Taiwan) Co. Ltd  
3F No. 2 DunHua South Road Sec.1,  
Taipei (105), Taiwan  
Tel: (8862) 8161 7688  
Fax: (8862) 8161 7614

## Thailand - Bangkok

Emerson Electric (Thailand) Ltd  
34th Floor, Interlink Tower,  
1858/133, Bangna Trad,  
Bangkok 10260, Thailand  
Tel: (662) 716 4700  
Fax: (662) 751 4241

## Vietnam

Emerson Climate Technologies - Vietnam  
Suite 307-308,  
123 Truong Dinh St., Dist.3  
Ho Chi Minh, Vietnam  
Tel: (84) 908 009 189

[EmersonClimateAsia.com](http://EmersonClimateAsia.com)

Asia 02 A01 03 – R02 Issued 09/2015 – GSCAA002

Emerson and Copeland Scroll are trademarks of Emerson Electric Co. or one of its affiliated companies.  
©2015 Emerson Climate Technologies, Inc. All rights reserved.

EMERSON. CONSIDER IT SOLVED.™